



JOB NAME:

CAT#:

TYPE:


APPLICATIONS

This strip light is mainly for commercial use. It can be used in commercial, retail, and institutional applications including gymnasiums, factories, and warehouses.


FEATURES & BENEFITS

- Ambient operating temperature -40°C to 40°C (-40°F to 104°F)
- L₇₀ > 50,000 hrs
- Optional sensor and emergency battery backup
- Surface or chain mountable
- Comparable to T8 or T5HO
- 5 year warranty
- cUL_{US} listed for damp locations

DIMENSIONS



- A - Keyhole slots for surface mounting**
- B - Wiring knockouts**
- C - T-Bar clip mounting hole**
- D - V-Hook openings for chain mounting**

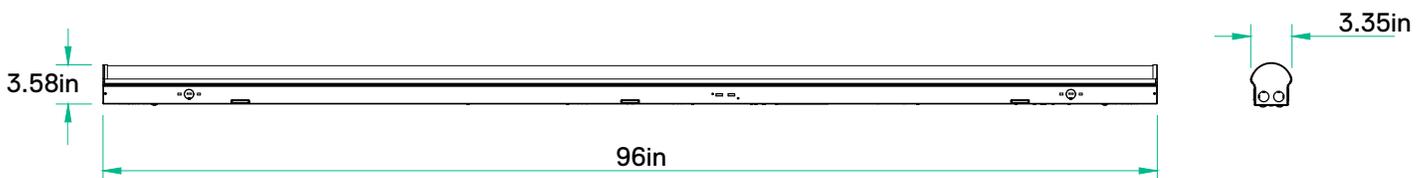

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:

TYPE:

MOUNTING OPTIONS

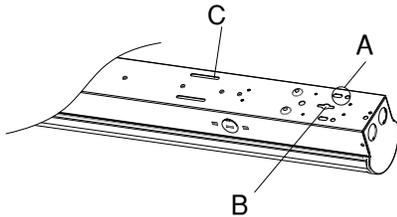


- A. Chain and V hook mounting
- B. Surface mounting
- C. Mounting plate installation

Installation Steps:




WARNING:
Before installation,
turn power off.


A. Chain and V hook mounting




A 1 1. Tie hook with chain (or wirerope) and then insert it into installation hole.



A 2 2. Fix chain to installation location, adjust the height of chain until fixture is balanced.




A 3 3. Connect AC wire and dimming wire.




A 4 4. Wrap wires with metal material.


B. Surface mounting




B 1 1. Lock the wire box cover.



B 2 2. Connect AC wire and dimming wire.



B 3 3. Lift up the fixture and put wires into box.



B 4 4. Lock the fixture by nail.


Notice:
If there is no wire box in the ceiling, you can not use the wire box cover.

Notice:
If you don't use dimming wire, please insulate both ends of dimming wire.


C. Mounting plate installation



C 1 1. Lateral movement and remove the diffuser.



C 2 2. Bend mounting plate, fixed to bottom of the fixture by screws, and then fix it to the installation position.



C 3 3. Connect wire. If connect wire at side, please insulate both ends of AC wire at the bottom.



C 4 4. Put the wire back in the box. Multiple fixtures can be installed on a line. But can not be connected to more than 10 fixtures because of limited wire load.

WARNING:
If connect wire at side, please insulate both ends of AC wire at the bottom.

WARNING:
Multiple fixtures can be installed on a line. But can't be connected to more than 10 fixtures because of limited wire load.

Dimensions and specifications subject to change without notice.

