

APPLICATIONS

The 10T is a full body micro silhouette makes a bold statement with a minimal design in brushed nickel powder coated finish (consult factory for other finishes). Scaled to the T5 lamp the matte white diffuser surrounds the lamps for soft lighting. Brushed nickel fixture can be surface mounted on wall or ceiling or pendant mounted with specially engineering cable mounting kit.

FEATURES & BENEFITS

- ◆ Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- ◆ Available in brushed nickel. Consult for other finishes
- ◆ Available with smooth frosted lens
- ◆ Clean body - No knock-outs on sides or ends
- ◆ Knock-outs on back accept standard electrical fittings (by others) Consult factory for other locations
- ◆ Available for one T5 14W, 21W or 28W linear fluorescent lamps
- ◆ Standard 120V residential electronic ballast is pre-wired to the lamp holders (consult factory for other voltage options and multi-volt commercial)
- ◆ Dimming and emergency battery back up options available (consult factory for availability and system compatibility)
- ◆ UL and C-UL listed for dry and damp locations



SIZE L x W x D in inches

1 Light - 22.5" or 34.5" or 46"L x 2"W x 2.6"D
 2 Light - 22.5" or 34.5" or 46"L x 3"W x 3"D

MOUNTING

Surface mount or Pendant mount. Horizontal or Vertical. Fixture and Ballast: UL Listed.

SPECIFICATIONS

Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion. Brushed nickel finish is standard. Knock-outs are located on rear of fixture and will accept any standard electrical fitting. T5 electronic multi-volt ballast for high-efficiency performance.

ORDERING DATA

EXAMPLE: 10T5 214MVBN

10T5		Lamp Type		Ballast ⁽¹⁾		Accessories	
Series	# of Lamps						
10T5 Round Surface Mount	1	14	14W T5	MV	Multi-Volt	A-10T5C1BN 5' Cable Mounting Kit	
10T5S Square Surface Mount	2 Per cross section	14TAN	14W T5 Tandem	120	Electronic 120V		
		21	21W T5	277	Electronic 277V		
		21TAN	21W T5 Tandem	R120	Residential 120V		
		28	28W T5	PMV	Program Multivolt		
		28TAN	28W T5 Tandem	DMV	Dimming Multivolt		

NOTES:

- 1) Whips, fuses, and cord sets available. Contact factory for details.
- 2) Change wattage codes to high output wattage. Consult for other designer finishes.

Dimensions and specifications subject to change without notice.



BALLAST SPECIFICATIONS

Brands


Code	Description
A	Advance
G	GE Ballast
L	Lutron
S	Osram/Sylvania
U	Universal

Performance Levels


Ballast			
Manufacturer	Standard - Leave blank if no preference	High Efficiency Instant Start	High Efficiency Program Start
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN, APH)
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)

DIMENSIONS


1 Light

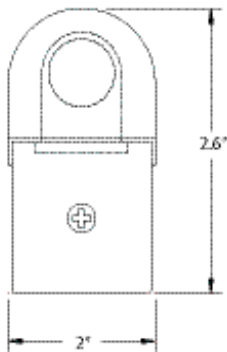


2 Light

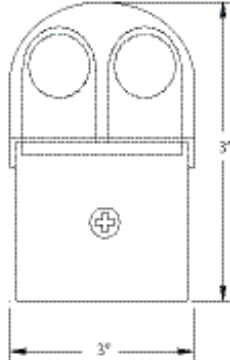

1 Light

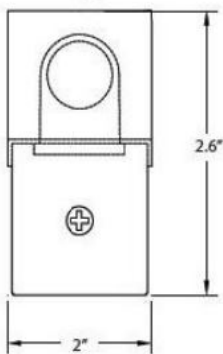

2 Light

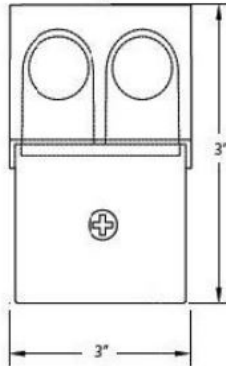

Dimensions and specifications subject to change without notice.

