

### APPLICATIONS

Stylish ceiling/wall mounted luminaire in either white or walnut finish with a variety of LED combinations and sizes enhanced by linear sided acrylic diffuser. Designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities, in displays.

### FEATURES & BENEFITS

- ◆ Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation
- ◆ Enhanced by linear sided acrylic diffuser
- ◆ White with a variety of LED combinations
- ◆ Overlapping end caps for uniformity and dimensional stability
- ◆ Min CRI 80
- ◆ ETL<sub>us</sub> Listed for damp locations



### SPECIFICATIONS


All metal parts are die formed from heavy gauge cold roll steel with overlapping end caps. Diffuser is a linear sided prismatic lens of extruded acrylic for controlled light.

### ORDERING DATA

**EXAMPLE: 155-24LED24DMVWH40**

Series	Size	LED Gear	Wattage / Lumens	Driver*	Finish	Color Temp	Options
155	24 24 inches 48 48 inches	LED	<b>2 ft.</b> 24 24 Watts 2900 Lumens 28 28 Watts 3400 Lumens 35 35 Watts 3200 Lumens  <b>4 ft.</b> 30 30 Watts 4065 Lumens 48 48 Watts 5985 Lumens 57 57 Watts 6855 Lumens 72 72 Watts 7000 Lumens	<b>DMV</b> Dimmable 120-277VAC 0-10V  <b>SDMV</b> Step Dimming 120-277VAC 100%-40%	<b>WH</b> White (Standard)  **Consult factory for other finish options	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>WP</b> 6' Whip 3 Wire Consult factory for other options

\*Consult for Triac dimming

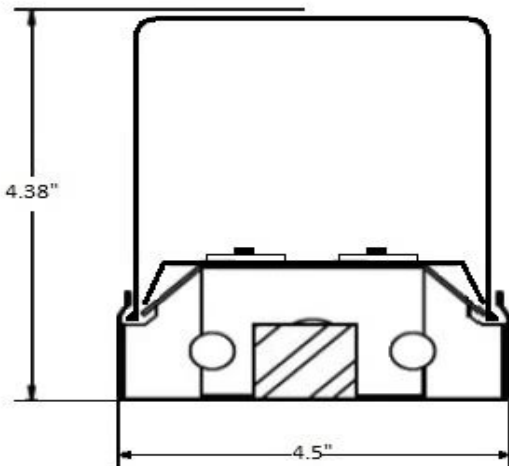

DLC Listed (4 ft DMV only)	
155-48LED30DMVWHxx	XX=30, 35, 40, 50
155-48LED48DMVWHxx	XX=30, 35, 40, 50
155-48LED57DMVWHxx	XX=30, 35, 40, 50

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆  
 8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	