

APPLICATIONS

Premium grade fluorescent narrow channel fixture. For use in indoor applications such as factories, warehouses, workshops, utility areas, coves and public buildings where industrial grade is required.

FEATURES & BENEFITS

- ◆ Snap-on components for easy assembly and maintenance
- ◆ Versatile end plate doubles as coupler for continuous row mounting
- ◆ Asymmetric and symmetric reflectors sold separately
- ◆ Available in lengths from 24 to 96 inches - (2', 3', 4', 8' lengths)
- ◆ Narrow body width 2 3/4" nominal
- ◆ Surface, stem or chain mountable
- ◆ Uses T5, T5HO or T8 lamps
- ◆ **UL** listed for damp location



SPECIFICATIONS

Housing is die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Single wireway cover on non-tandem units. Knockouts are provided for stem mounting. Mounting holes are provided. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: 42 132MVB1

Series	# of Lamps	Lamp Type	Ballast Type	Options*
42 Premium Channel	1	15 18" T8	MV Multivolt 120-277	B1 Battery backup 1 lamp
	2	17 24" T8	120 120 Volt	B2 Battery backup 2 lamp
		24 24" T5	277 277 Volt	+ 2 Ballasts
		25 36" T8	R120 Residential 120	RIF Radio Interference Filter
		28 46" T5	PMV Program Multivolt	
		28TAN 46" TAN T5	DMV Dimming MV	* Call for additional options
		32 48" T8	**LED 1 End Hot self	
		32TAN 2-48" TAN T8	driven LED tubes	
		54 48" T5HO	**LED2E 2 End Hot self	
		54TAN 2-48" TAN T5HO	driven LED tubes	

**Assembled with no ballast, made for UL Listed, self ballasted retrofit LED lamps

Brands

Code No.	Description
A	Advance
G	GE Ballast
L	Lutron
S	Sylvania Ballast
U	Universal

Performance Levels

Ballast			
Manufacturer	Standard	High Efficiency Instant Start	High Efficiency Program Start
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN)
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)


Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	
TYPE	

DIMENSIONS

END VIEW

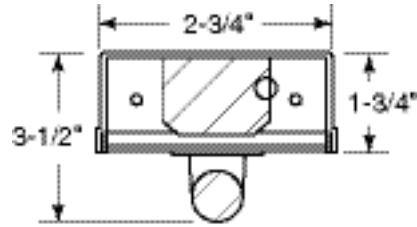

1 and 2 Lamp

Dimensions and specifications subject to change without notice.



CAT#			
JOB NAME		TYPE	