


### APPLICATIONS

A shallow economy designed 7" wraparound LED luminaire available in either two or four foot lengths that is maintenance free and has a low initial cost. This series also delivers excellent brightness control and is suitable for individual or continuous run installations.

### FEATURES & BENEFITS

- ◆ Low initial cost, maintenance free, excellent brightness control
- ◆ Design embossed ends are locked and secures to the housing
- ◆ Suitable for individual or continuous run installations
- ◆ Made with US Steel
- ◆ Min CRI 80
- ◆ ETL Listed for damp locations
- ◆ L70- Reported  $\geq$  54,000 hours (calculated=115,000 hours)
- ◆ BAA/ARRA Compliant

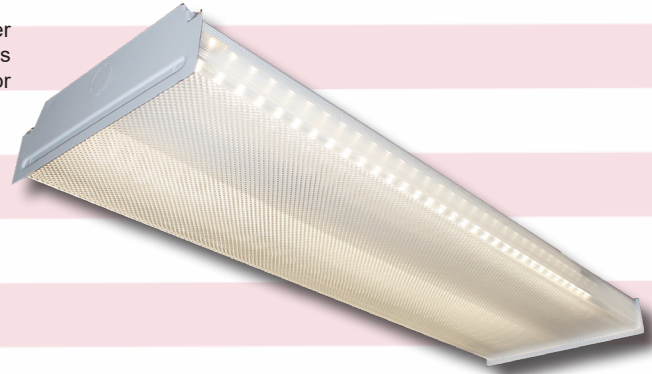

### SPECIFICATIONS


Completely die formed from heavy gauge cold rolled steel. A crystal clear diffuser extruded from 100% virgin acrylic that will maintain it's color under normal conditions, indefinitely. Linear prisms on the interior side walls direct the light ceilingwards. The bottom is composed of an evenly spaced pattern of conical prisms yielding low brightness, glare-free, diffused light.

### ORDERING DATA

**EXAMPLE: 769-24PLED22DMV40**

| Series                     | Length           | Suffix              | Gear | Wattage / Lumens   | Driver                            | Color Temp                                   | Options  |
|----------------------------|------------------|---------------------|------|--|-----------------------------------|--|--|
| 769<br>LED Premium<br>Wrap | 24 24"<br>48 48" | P<br>(Professional) | LED  | 2 ft.<br>22 22 Watts 2650 Lumens<br>4 ft.<br>37 37 Watts 4520 Lumens | DMV 120-277 VAC<br>0-10V Dimmable | 30 3000K<br>35 3500K<br>40 4000K<br>50 5000K | WP 6' whip, 3 wire<br>EM 10W, 1200 Lumen<br>Battery backup<br>EM5 5W, 600 Lumen<br>Battery backup<br>EM7 7W, 840 Lumen<br>Battery backup<br>EM4F Emergency<br>Battery<br>Pack, 4W ~450<br>Lumens |

### DIMENSIONS

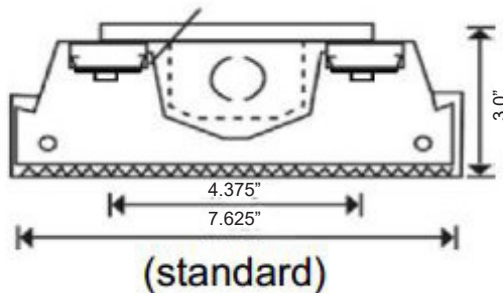

\* Consult for other options

Values based on ambient temp of 25°C and 4000K  
Lumens are subject to a tolerance of  $\pm$  10%  
Wattage is approximate and subject to a tolerance of  $\pm$  5%  
Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

CAT#

JOB NAME

TYPE