

APPLICATIONS

Economically designed narrow wraparound provides reliable and efficient lighting. Ideal for use in indoor applications such as homes, modular homes, mobile homes, stores and public building where low glare and ease of installation is required.

FEATURES & BENEFITS

- ◆ > 90% reflectivity
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ Nominal 9" width with a shallow design
- ◆ Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- ◆ Diffuser self-aligns and hinges from either side for easy maintenance
- ◆ Available in lengths from 24 to 48 inches - (2' & 4' lengths)
- ◆ Standard two lamp configuration
- ◆ Easy re-lamping and re-ballasting
- ◆ Single or continuous row mounting capability
- ◆ Surface, stem or chain mountable
- ◆ Every fixture individually tested
- ◆ **UL** listed for damp location



SPECIFICATIONS

Housing and ends are die-formed and embossed from cold rolled steel. Finish is high reflectance **P3 - Post Powder Paint**. Inspection knockouts provided for mounting to junction box. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser hinges from either side in a lift and shift manner and is self-centering. End caps may be butted together for continuous row mounting. Narrow design provides spacing for cooler operation. Knockouts are provided for stem mounting. Listed by and bears **UL** label.


ORDERING DATA

EXAMPLE: 741-24LED24DMV30

| 770 | | 2 | | | | | | | | | | |
|--------|---------------|-----------|----|--------------|---------|-----------------------------------|-------|---------------|---------------------------|-----------------------------|----|-----------------------|
| Series | Lamp Position | Lamp Size | | Ballast Type | | Voltage | | Options | | | | |
| 770 | 2 | 2 lamp | 17 | 24" T8 | MV | Multivolt 120-277V | Blank | Not specified | B1 | Battery backup 1 lamp | | |
| | | | 28 | 48" T5 | LED** | Wired 1 end hot for T8 LED tubes | | | 277 | 277 Volt | B2 | Battery backup 2 lamp |
| | | | 32 | 32" T8 | LED2E** | Wired 2 ends hot for T8 LED tubes | | | L41 | Lamp included (T5/T8-4100K) | | |
| | | | 54 | 54 48" T5HO | | | | | L35 | Lamp included (T5/T8-3500K) | | |
| | | | | | | | | RIF | Radio interference filter | | | |
| | | | | | | | | 11 | Dual Ballast 2 lamp | | | |

**Assembled with no ballast, made for UL Listed, self-ballasted retrofit T8 LED lamps

*Call for additional options

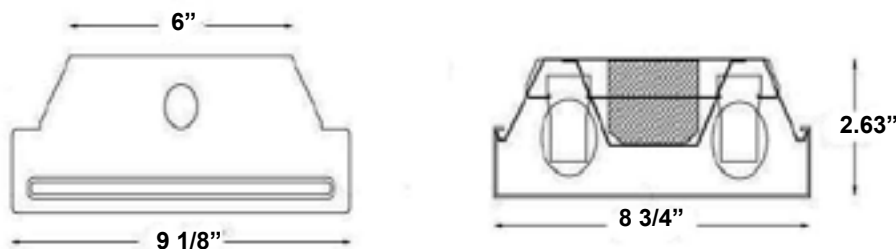

Dimensions and specifications subject to change without notice.