


**APPLICATION**

Narrow body energy efficient wrap for commercial and institutional facilities.  
Ideal for replacing existing strip louver lighting in educational facilities.

**FEATURES & BENEFITS**

- ◆  Technology - **Post Powder Paint**
- ◆ > 90% reflectivity
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ Nominal 9" width
- ◆ Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- ◆ Diffuser self-aligns and hinges from either side for easy maintenance
- ◆ Available in lengths of 48 and 96 inches - (4' & 8' lengths)
- ◆ Easy re-lamping and re-ballasting
- ◆ Single or continuous row mounting capability
- ◆ Surface, stem or chain mountable
- ◆ Every fixture individually tested
- ◆ **UL** listed for damp location



**SPECIFICATIONS**

Housing and ends are die-formed and embossed from cold rolled steel. Finish is high reflectance **P3 - Post Powder Paint**. Inspection knockouts provided for mounting to junction box. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser hinges from either side in a snap on manner and is self-centering. End caps may be butted together for continuous row mounting. Narrow design provides spacing for cooler operation. Knockouts are provided for stem mounting. Listed by and bears **UL** label.


**ORDERING DATA**

**EXAMPLE: 774 2 32 ELO DT B1**


| 774        |            |        |              |          |   |                                   |         |                                     |               |   |            |          |
|------------|------------|--------|--------------|----------|---|-----------------------------------|---------|-------------------------------------|---------------|---|------------|----------|
| Series     | # of Lamps |        | Lamp Size    |          | Ballast Type  |                                   | Voltage |                                     | Options*      |   |            |          |
| <b>774</b> | <b>1</b>   | 1 Lamp | <b>32</b>    | 48" T8   | <b>MV</b>   | Multivolt 120-277V                |         | <b>Blank</b>                        | Not specified | <b>B1</b> Battery backup 1 lamp<br><b>B2</b> Battery backup 2 lamp<br><b>L41</b> Lamp included (T5/T8-4100K)<br><b>L35</b> Lamp included (T5/T8-3500K)<br><b>RIF</b> Radio interference filter<br><b>11</b> Dual Ballast 2 lamp |            |          |
|            | <b>2</b>   | 2 Lamp | <b>32TAN</b> | 48" T8   | <b>LED**</b>  | Wired 1 end hot for T8 LED tubes  |         |                                     |               |   | <b>277</b> | 277 Volt |
|            | <b>3</b>   | 3 Lamp | <b>54</b>    | 46" T5HO | <b>LED2E**</b>  | Wired 2 ends hot for T8 LED tubes |         |                                     |               |   |            |          |
|            |            |        |              |          | **Assembled with no ballast, made for UL Listed, self ballasted retrofit T8 LED lamps |                                   |         | <b>*Call for additional options</b> |               |   |            |          |

Dimensions and specifications subject to change without notice.

**CROSS SECTION**

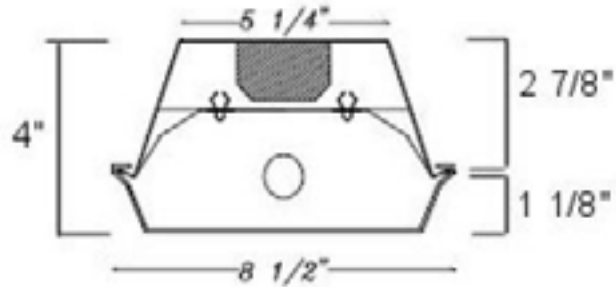

**BACK VIEW**

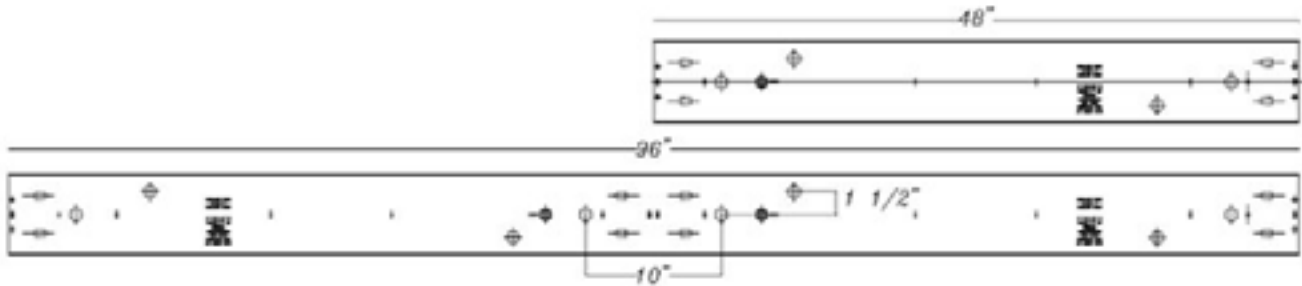

Dimensions and specifications subject to change without notice.