

APPLICATIONS

This line of open slimline fixtures provides the most economical lighting for industrial and commercial applications such as factories, warehouses, workshops, utility areas and public buildings.

FEATURES & BENEFITS

- ◆ Snap-on components for easy assembly and maintenance
- ◆ Combination end plate/coupler can be used for continuous row mounting
- ◆ Available in lengths from 48-96 inches - (4', 6', 8' lengths)
- ◆ Surface, stem or chain mountable
- ◆ Uses T8 or T12 lamps
- ◆ UL Listed for damp location

SPECIFICATIONS



Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Snap-in end plates can serve as joiners for continuous row mounting. Snap-on ballast covers are two piece for simple installation and maintenance. Knockouts are provided for flexible conduit attachment and stem mounting. Mounting holes are provided. Listed by and bears **UL** label.



ORDERING DATA

EXAMPLE: 80 2 48 ELOHO DT B1

80													
Series	# of Lamps		Lamp Size			Ballast Type		Options					
80	1	1 Lamp	48	T8HO/T12HO	48"	MV	Multivolt 120-277V	B1	Battery backup 1 lamp, 500 lumen				
	2	2 Lamp	72	T8HO/T12HO	72"					120	120V	B2	Battery backup 2 lamp, 700 lumen
			96	T8HO/T12HO	96"					277	277V	11	Dual ballast 1 lamp + 1 lamp
						MV	Multivolt 120-277V	RIF	Radio interference filter				
						LED**	Wired 1 end hot for T8 LED tubes	*Call for additional options					
						LED2E**	Wired 2 ends hot for T8 LED tubes						
						** Assembled with no ballast, made for UL Listed, self ballasted retrofit LED lamps							

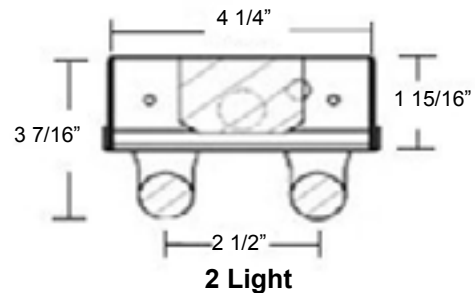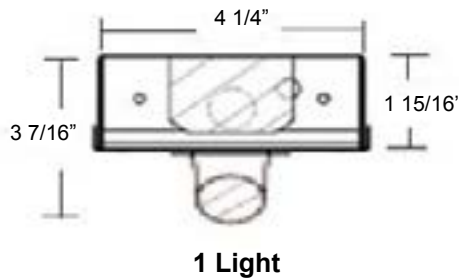

Dimensions and specifications subject to change without notice.