


SPECIFICATIONS


- 120-277V INPUT VOLTAGE, 50/60Hz
- 8 CREE LED ARRAY (18W)
- 1704 LUMENS
- 77 LPW**
- 3000 KELVIN
- 80 CRI (TYP)
- CONSTANT CURRENT AT 700 mA
- DRIVER UL CLASS 2, POWER FACTOR > .90
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +40°C (105°F)
- ESTIMATED 50,000 HRS L₇₀*
- THERMALLY PROTECTED LED ARRAY
- FROSTED GLASS DIFFUSER
- WHITE POWDER COATED ALUMINUM PAN
- UL/CUL LISTED FOR DAMP LOCATION



DECWG

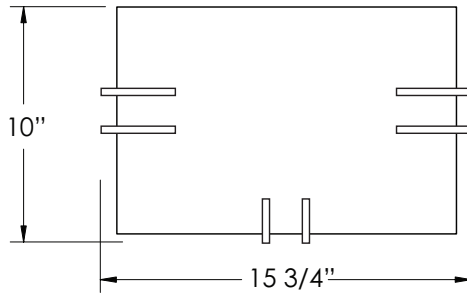

DEC

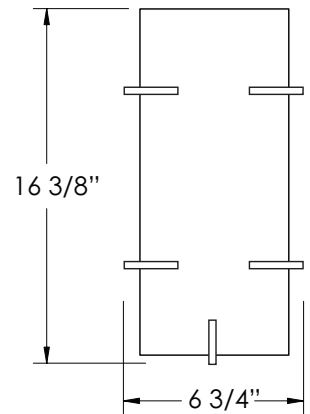

	LED		18	MV	30	
Series	Gear	Fixture	Wattage	Voltage	Kelvin	Options
DECWG DEC	LED	BN = Brushed Nickel BR = Bronze	18 = 18 Watts	MV = 120-277V	30 = 3000K	O = Occupancy Sensor

LAUREL MLWL LED REPLACEMENT PARTS
18LR8L = 8 CREE LED ARRAY
IG1800-DMV-1 = LED DRIVER

LAUREL MLWN LED REPLACEMENT PARTS FOR
18LR8E = 8 CREE LED ARRAY
IG1800-DMV-1 = LED DRIVER

* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

** ESTIMATED FROM LED SOURCE

Specifications subject to change without notice. Printed in U.S.A. © 2013 Mobern Lighting Company

