

Application

High efficiency T5 High Output or T8 fixtures engineered for premium performance in medium and high ceiling applications ideally suited for warehouses, manufacturing plants, sports facilities and retail spaces. A precision-formed reflector system available in either highly reflective mirror or enhanced white reflector achieve maximum light output for ceilings from 15 feet to 40 feet. The unique lamp arrangement is ideal for wide area lighting to put the light exactly where you need it with less fixtures. Based on ceiling height, these fixtures can replace an HID high bay using half of the wattage. Pendant, chain or stem mounting. Optional wireguard allows easy lamp access. Highest quality materials and workmanship.

FEATURES & BENEFITS

- ◆ Designed for pendant, stem or chain hanging
- ◆ Mounting holes are provided for simple, fast installation
- ◆ Every fixture is individually tested
- ◆ 91% Reflectivity
- ◆ Ballasts available to meet CEE listing requirements
- ◆ **UL/cUL** listed for damp location



ELECTRICAL

All ballasts are Class P rated and UL/CUL listed. Our ballasts are thermally protected, sound rated and tightly secured to chassis. Consult for the specific ballast required. Available in 120V, 277V, 347V and 480V.

MOUNTING

Designed for pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation. See Buyers Guide for list of all mounting options available and sold separately.

SPECIFICATIONS

Housing is 22 gauge prepainted steel. Air vents surround the ballast and lamps in the back of the fixture to maximize lamp and ballast performance, reliability and life. High reflective mirror or enhanced white reflectors are computer designed to maximize photometric performance and put the light where you need it. Reflector snaps into fixture with no tools and is easily removable for ballast maintenance. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger and cable kit. Uplight slots are optional to add uplight. Integral Occupancy Sensor is optional and available on 6 light fixture only and is ideal for wire guard applications. This fixture is not designed to be surface mounted to the ceiling or wall.

ORDERING DATA

EXAMPLE: FHBC1054MVB1

FHBC						
Series	Frame Option	# of Lamps	Lamp Type	Reflector ¹	Ballast ^{2,3}	Options ^{1,3,4,5}
FHBC Premiere Fluorescent High Bay	Blank No Frame Door Frame/Lens Door Frame/Wireguard Door Frame/Lens/Wireguard	10 12 (per cross section)	28 48" T5 32 48" T8 54 46" T5HO	Blank Full Specular Mirror, Wide Distribution	MV 120 - 277V 480 480V PMV Program Start LED 1 End Hot Self driven line voltage LED tube LED-2E 2 End Hot Self driven line voltage LED tube	See Options

Notes

- 1) Custom reflectors available to create any light distribution. See Reflector Options for details.
- 2) Standard ballast configuration on 10L, is two four lamp and one two lamp. Standard ballast configuration on 12L, is three four lamp ballast.
- 3) See technical information section for additional ballast options.
- 4) Consult factory for occupancy and daylight sensors.
- 5) Consult factory for custom options



Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE

OPTIONS AND ACCESSORIES

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors, Hanging kits, Wire guards. Contact factory for additional options.

REFLECTOR OPTIONS

- W** Enhanced white, Standard Distribution
- XSN** Full specular mirror reflector, no uplight, narrow distribution
- UP** Full specular mirror reflector, wide distribution, with uplight slots
- XSNUP** Full specular mirror reflector, narrow distribution, with uplight slots
- WUP** Enhanced white reflector, standard distribution, with uplight slots

ACCESSORIES

10 & 12 Light Accessory Chart	
L-FHBC10CLENS	6L Clear lens .100
L-FHBC10CL125LENS	6L Clear lens .125
L-FHBC10ALENS	6L Acrylic lens .100
L-FHBC10A125LENS	6L Acrylic lens .125

OPTIONS

- | | |
|--|--|
| <ul style="list-style-type: none"> B1 T8/T5 1L 500 Lumens Battery Backup (B11) B2 T8/T5 1L/2L 700 Lumens Battery Backup (B48) B3 T8/T5 1L/2L 1400 Lumens Battery Backup (B223) B4 T8/T5 1L/2L 3000 Lumens Battery Backup (B510)
*Remote mount only B51 T5HO 1L 500 Lumens Battery Backup (B625) B52 T5HO 1L 800 Lumens Battery Backup (B585) B53 T5HO 1L 1300 Lumens Battery Backup (B626) OS Occupancy Sensor | <ul style="list-style-type: none"> L41 741K Lamps Installed L35 735K Lamps Installed L841 841K Lamps Installed L835 835K Lamps Installed RIF Radio Interference Filter CL Clear .100 CL125 Clear .125 A Acrylic .100 A125 Acrylic .125 |
|--|--|

BALLAST OPTIONS

Brands

Code No.	Description
A	Advance
G	GE Ballast
L	Lutron
S	Sylvania Ballast
U	Universal

Performance Levels


Ballast			
Manufacturer	Standard - Leave blank if no preference	High Efficiency Instant Start	High Efficiency Program Start
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN ???)
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)

Dimensions and specifications subject to change without notice.



CAT#		
JOB NAME		TYPE

DIMENSIONS

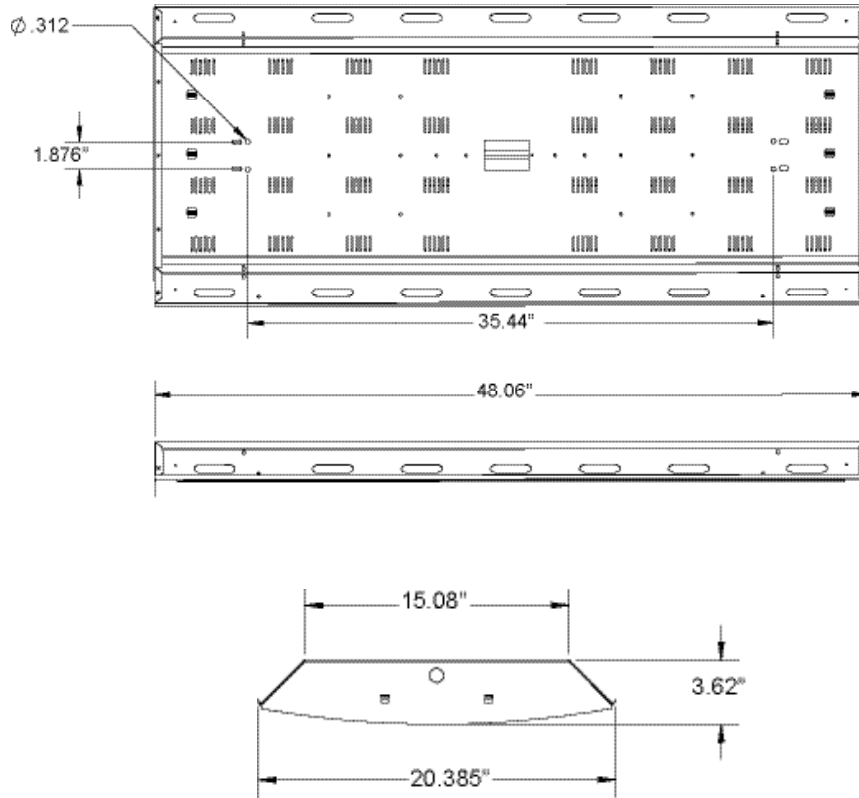

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	TYPE