

APPLICATIONS

The FHBF series is the workhorse of our high bay fluorescent series, designed especially for high light output. The fixtures uses premium mirrored reflectors for high efficiency lighting. A sturdy/durable fixturebody with superior appearance and appeal, suitable for commercial, retail and industrial applications. Mounts easily with chain or cable kit.

FEATURES & BENEFITS

- ◆ Four lamp positions
- ◆ Baked white enamel code gauge steel.
- ◆ Premium full specular mirrored reflector
- ◆ Multiple KOs and access plate
- ◆ 4 point chain mount
- ◆ White aluminum reflector available
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location

SPECIFICATIONS

Body and ends are die blanked, pierced and formed of 22 gauge cold rolled prime steel for rigidity and uniformity. Forming of the housing has been engineered to provide added strength along its entire length. This fixture is not designed to be surface mounted to the ceiling or wall. Listed by and bears **UL** label.



ORDERING DATA

EXAMPLE: FHBF-654WMV

FHBF		Length		Ballast Type		Options	
Series	# of Lamps	(Blank) 4' length	TAN 8' length	MV	Electronic 120V to 277V	B1	T8/T5 1L 500 Lumens Battery Backup (B11)
FHBF	4 4 Lamp 6 6 Lamp			120	Electronic 120V	B2	T8/T5 1L/2L 700 Lumens Battery Backup (B48)
				277	Electronic 277V	B3	T8/T5 1L/2L 1400 Lumens Battery Backup (B223)
				R120	Residential Electronic 120V	B4	T8/T5 1L/2L 3000 Lumens Battery Backup (B510)
				PMV	Program Start Multivolt		*Remote mount only
				D120	120V Dimming	B51	T5HO 1L 500 Lumens Battery Backup (B625)
				D277	277V Dimming	B52	T5HO 1L 800 Lumens Battery Backup (B585)
				DDT	Sylvania T8 Dual Tap Dimming	B53	T5HO 1L 1300 Lumens Battery Backup (B626)
				SD	Step Dim Multi Volt	GR	Greenfield 3 Wire
				LD120	120V Lutron Dimming	GR1	Greenfield 4 Wire
				LD277	277V Lutron Dimming	RIF	Radio interference filter
						SS	Integral Smart Sense
						OS	External Occupancy Sensor

Sold on the side

- A-FHBFWG - Wire Guard 4 or 6L Galv.
- A-FHBFWG-WH - Wire Guard 4 or 6L White


Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	TYPE

DIMENSIONS

TOP VIEW

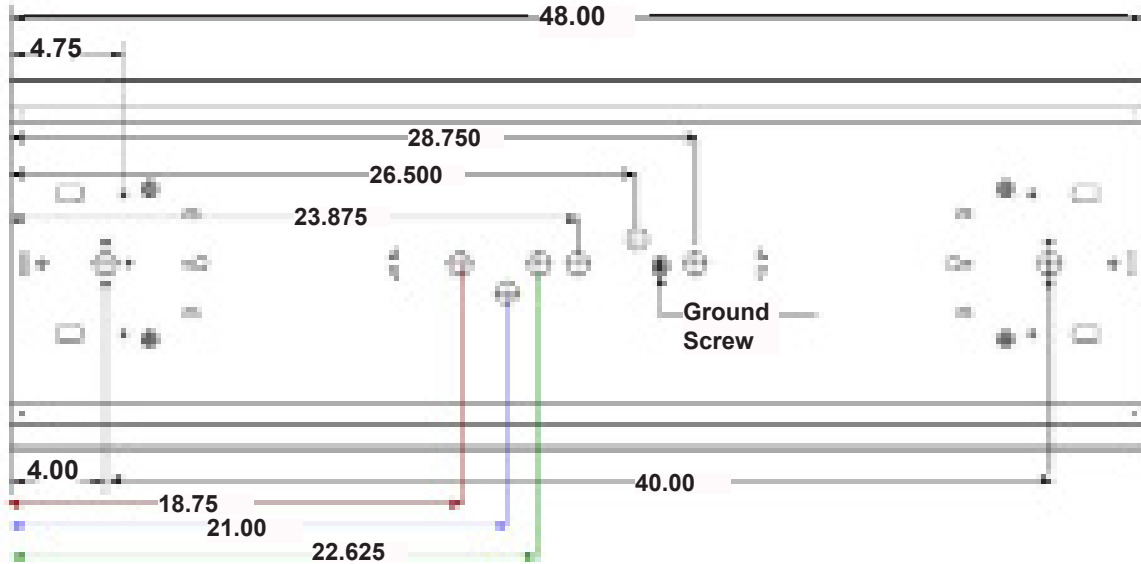

*Top of housing width is 11 5/8"

Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	TYPE