

APPLICATIONS

The FHBRP series is offered with baffles to cut glare and is dressed for applications requiring aesthetic appeal. Available with white gear trays for wider distribution or standard without reflector for good economical performance. Mounting options include chain, stem or pendant cable. Custom paint finishes available. Ideal for retail applications.

FEATURES & BENEFITS

- ◆ 0-10V Dimming
- ◆ Designed for pendant, stem or chain hanging
- ◆ Mounting holes are provided for simple, fast installation
- ◆ Every fixture is individually tested
- ◆ 91% Reflectivity
- ◆ ^CETL_{US} listed for damp location
- ◆ Min CRI 80

SIZE W x L x H in inches

4 ft. - 11.25W x 48L x 4.25H
8 ft. - 11.25W x 96L x 4.25H



MOUNTING

Designed for pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation. See Buyers Guide for list of all mounting options available and sold separately.

SPECIFICATIONS

Housing is 22 gauge prepainted steel. Air vents surround the driver and boards in the back of the fixture to maximize performance, reliability and life. Enhanced white gear trays are computer designed to maximize photometric performance and put the light where you need it. Reflector snaps into fixture with no tools and is easily removable for driver maintenance. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, and cable kit. Integral Occupancy Sensor is optional and is ideal for wire guard applications. This fixture is not designed for surface mounting on ceiling or wall.

ORDERING DATA

EXAMPLE: FHBRP48LED32DMV40

FHBRP		LED		DMV		Color Temp		Options	
Series	Size	Gear	Wattage		Driver Type	Color Temp		Options	
FHBRP	48 48 inch	LED	4 ft		DMV 120-277V	30 3000K	CS 6 ft. 3 wire		
LED Premium Baffle High Bay	96 96 inch		32 32 Watts 3450 lumens		0-10V	35 3500K	CS8 8 ft. cord, no plug		
			48 48 Watts 5640 lumens		Dimmable	40 4000K	CS12 12 ft. cord		
			57 57 Watts 6400 lumens			50 5000K	WP 6 ft. 3 wire, whip		
			8 ft				WP10 6 ft. 3 wire, whip		
			97 97 Watts 11300 lumens				EM 10W, 1200 lumen, battery backup		
			114 114 Watts 12800 lumens				EM5 5W, 600 lumen battery backup		
			144 144 Watts 19500 lumens				EM7 7W, 840 lumen battery backup		

Dimensions and specifications subject to change without notice.




◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE

TECHNICAL INFORMATION

Size	Wattage	Initial Lumens (lm)	Efficacy (lm/W)	Kelvin Temperature	CRI
48"	32	3450	108	3000k 3500k 4000k 5000k	80+
48"	48	5650	118	3000k 3500k 4000k 5000k	80+
48"	57	6400	112	3000k 3500k 4000k 5000k	80+
96"	97	11300	116	3000k 3500k 4000k 5000k	80+
96"	114	12800	112	3000k 3500k 4000k 5000k	80+

DIMENSIONS

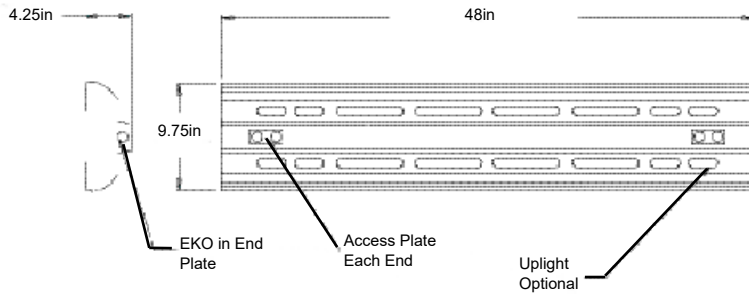

Dimensions and specifications subject to change without notice



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE