

APPLICATIONS

The FHBRP series is offered with baffles to cut glare and is dressed for applications requiring aesthetic appeal. Available with white gear trays for wider distribution or standard without reflector for good economical performance. Mounting options include chain, stem or pendant cable. Custom paint finishes available. Ideal for retail applications.

FEATURES & BENEFITS

- ◆ 0-10V Dimming
- ◆ Designed for pendant, stem or chain hanging
- ◆ Mounting holes are provided for simple, fast installation
- ◆ Every fixture is individually tested
- ◆ 91% Reflectivity
- ◆ cETL_{US} listed for damp location
- ◆ Min CRI 80
- ◆ Made with US Steel
- ◆ BAA/ARRA Compliant



SPECIFICATIONS

Housing is 22 gauge prepainted steel. Air vents surround the driver and boards in the back of the fixture to maximize performance, reliability and life. Enhanced white gear trays are computer designed to maximize photometric performance and put the light where you need it. Reflector snaps into fixture with no tools and is easily removable for driver maintenance. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, and cable kit. Integral Occupancy Sensor is optional and is ideal for wire guard applications. This fixture is not designed for surface mounting on ceiling or wall.


ORDERING DATA

EXAMPLE: FHBRP48P-LED37DMV40

FHBRP		P		LED							
Series	Length	Suffix	Gear	Wattage / Lumens		Driver		Color Temp		Options	
FHBRP	48 48"	P	LED	4 ft		DMV		30	3000K	CS	6 ft, 3 wire
LED Premium	96 96"	(Professional)		37	37 Watts 4800 Lumens	Factory Installed		35	3500K	CS8	8 ft. cord, no plug
Baffle High Bay				74	74 Watts 9600 Lumens	120-277 VAC		40	4000K	CS12	12 ft. cord
						Dimmable		50	5000K	WP	6 ft. 3 wire, whip
						Multivolt 0-10V				WP10	6 ft. 3 wire, whip
										EM	10W, 1200 lumen battery backup
										EM5	5W, 600 lumen battery backup
										EM7	7W, 840 lumen battery backup

* Consult for other options

DIMENSIONS

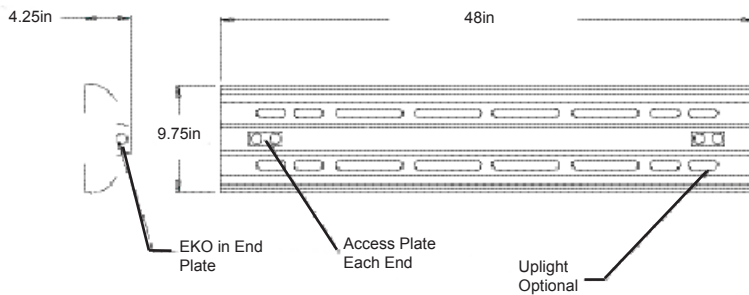

Values based on ambient temp of 25°C and 4000K
 Lumens are subject to a tolerance of ± 10%
 Wattage is approximate and subject to a tolerance of ± 5%
 Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
 8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	