

### APPLICATIONS

The HBA is a high efficiency LED aisle lighter that is engineered for premium performance in medium and high ceiling applications ideally suited for aisle warehouses, manufacturing plants, sports facilities and garages. A precision-formed reflector system is available in highly reflective enhanced aluminum to achieve maximum light output for ceilings from 15 feet to 40 feet. The unique arrangement is ideal for wide area lighting to put the light exactly where you need it with less fixtures. Based on ceiling height, these fixtures can replace an HID high bay using half the wattage. Surface, pendant, chain or stem mounting. It is made with the highest quality materials and workmanship.



### FEATURES & BENEFITS

- ◆ Size: 7.899W x 48.00L x 4.30D
- ◆ Designed for surface, pendant, stem or chain hanging
- ◆ Mounting holes provided for simple, fast installation.

### SPECIFICATIONS




Housing is 22 gauge prepainted steel. Air vents surround the drivers in the back of the fixture to maximize LED and driver performance, reliability and life. High reflective enhanced aluminum reflectors are computer designed to maximize photometric performance and put the light where you need it. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, cable kit and surface mount.

### ORDERING DATA

### EXAMPLE: HBA48LED110DMV40

HBA

Series	Length	Gear	Wattage & Lumens	Driver	Color Temp	Options
<b>HBA</b>	<b>48</b> 48" Nom.	<b>LED</b>	<b>4 Ft.</b>	<b>DMV</b> 120-277 VAC 0-10V Dimmable (Leads not installed)	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>OS</b> Wide Occupancy Sensor <b>OSD</b> Dimmable Occupancy Sensor <b>OSDPC</b> Occupancy Sensor w/Photo Control <b>CS</b> 6' 18/3 Flexible Cord <b>CS-5W</b> 6' 5 Wire Flexible Cord for 0-10V Dimming <b>WP</b> 6 ft. 3 wire, MC whip <b>WP12</b> 12 ft. 3 wire, MC whip <b>WG</b> Wire Guard <b>EM</b> 10 Watt Emergency ~1500 Lumens
	<b>96</b> 96" Nom.		<b>110</b> 110 watts 16000 Lumens <b>144</b> 144 watts 20000 Lumens <b>8 Ft.</b> <b>162</b> 162 watts 24000 Lumens <b>220</b> 220 watts 32000 Lumens <b>288</b> 288 watts 40000 Lumens	<b>FIDMV</b> 120-277 VAC 0-10V Dimmable (Factory installed dimming leads)		<b>*Consult Factory for more Options.</b>

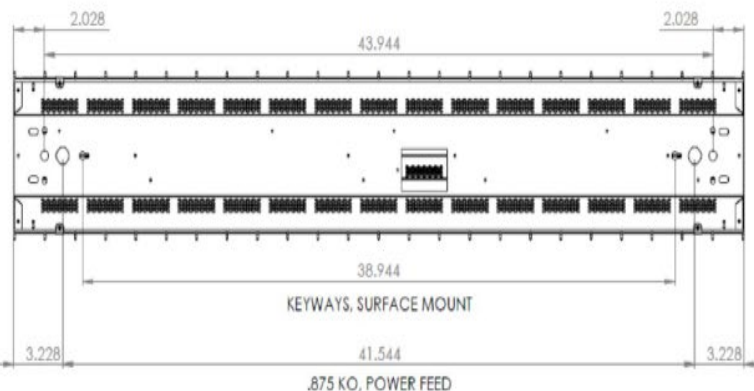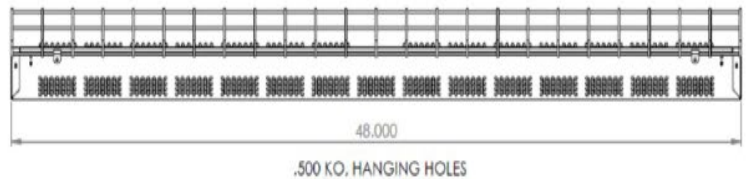

Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆  
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	