


APPLICATIONS

A linear 2x3 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 2x3 Series fixtures can be installed individually or in a continuous run. Specifically designed for direct/indirect lighting with snap-in lens to hide the lamps or LED arrays. Ideal where downlight and uplight are required.

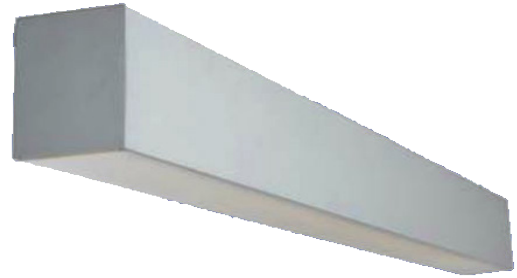

FEATURES & BENEFITS

- ◆ Accepts various lenses or louvers.
- ◆ Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable.
- ◆ ETL listed for damp locations
- ◆ CRI 80+

SPECIFICATIONS

Die-formed and welded 22 gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. Housing is specially designed for direct/indirect lighting with separating lamps compartments for each. Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers. Snap in lens is ideal for uplight.

ORDERING DATA

EXAMPLE: L23PMW48LED45DMVWH40

Series		Length	Gear	LED Module Distribution		Finish	Color Temp	Configuration		
L23W Wall Mount L23P Pendant Mount L23S Surface Mount L23R Regular Recessed Lay-in For Dropped Ceilings L23RR Recessed w/ 1/2" Flange To Sit Behind Drywall (For Before Drywall Installation) L23RF Flange To Sit On Surface Of Drywall (For Existing Drywall Installation)		48 48 inch 96 96 inch	LED	Blank U 1U2D	Downlight (std) Uplight Uplight & Downlight	WH White BK Black SI Silver	30 3000K 35 3500K 40 4000K 50 5000K	Blank -B -E -J	Individual Beginner Run Ender Run Joiner	
				Lens Material		Wattage & Lumen		Driver & Voltage		
				MW	Matte white lens (std) Only available for down light		Up or Down Light 4 ft.		DMV	120-277VAC Dimming Multivolt, 0-10V
				SF	Snap-in frosted acrylic lens (85% transmission) Special for LEDs. (Only available for uplight & downlight)		26	26 Watts 2600 Lumens	FIDMV	120-277VAC Factory Installed Dimming 0-10V
						38	38 Watts 3800 Lumens	Options		
						45	45 Watts 4500 Lumens	HC301WH	Cable kit with 4' cable & power feed 0-10V Dimming. Cable incl. w/white canopy	
						1 Up & 2 Down Only 8 ft.		HC301WH5W	Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)	
						52	52 Watts 5200 Lumens	HC302WH	Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy	
						76	76 Watts 7600 Lumens	HC302WH5W	Cable kit with 12' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire)	
						90	90 Watts 9000 Lumens	2SCS24WH	Two stem kits w/24" stem, canopy & mounting hardware for 4' fixture	
					1 Up & 2 Down Only 4 ft.		Plug in Options			
					36	36 Watts 1200U-2400D	PI1	3 wire harness, including white, black and green		
					54	54 Watts 1800U-3600D	PI2	4 wire harness, including white, black, green and blue for emergency backup		
					8 ft.		PI3D	5 wire harness, including white, black, green, violet and gray		
					72	72 Watts 2400U-4800D				
					108	108 Watts 3600U-7200D				
					Up or Down Light 8 ft.					
					52	52 Watts 5200 Lumens				
					76	76 Watts 7600 Lumens				
					90	90 Watts 9000 Lumens				

Dimensions and specifications subject to change without notice.



*Consult factory for more options



800-444-WATT ♦ www.mobern.com ♦

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME

TYPE


**WALL MOUNT
48L Drawing**

.875 KNOCKOUT DISTANCES

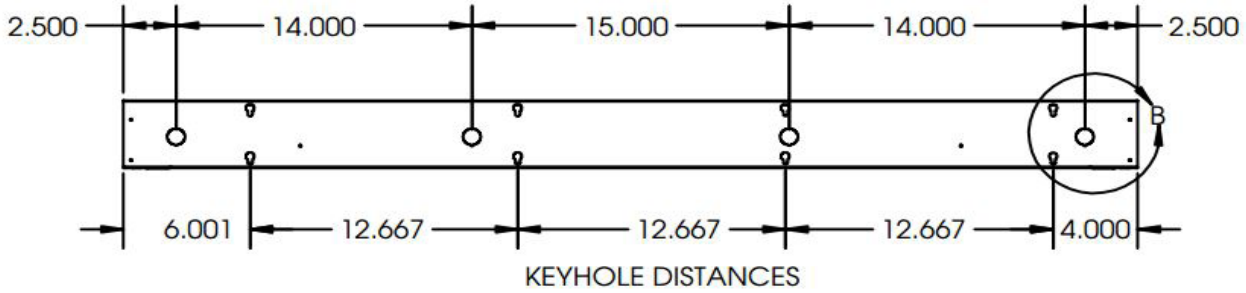

**SURFACE MOUNT
96L Drawing**


.500 KNOCKOUT DISTANCES

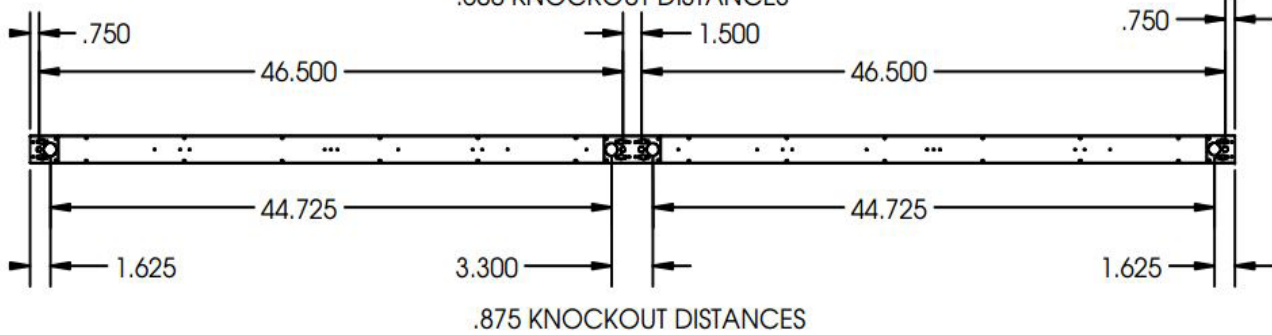


.875 KNOCKOUT DISTANCES

Flange Details


Type RR
Recess for Drywall/
Hard Ceiling
-RR (1/2 inch)
-RR650 (5/8 inch)
-RRxxx (custom depth)




Type RF
Flush for Drywall



Type R
For 1" T-bar



Surface Mounted/Pendant Mounted

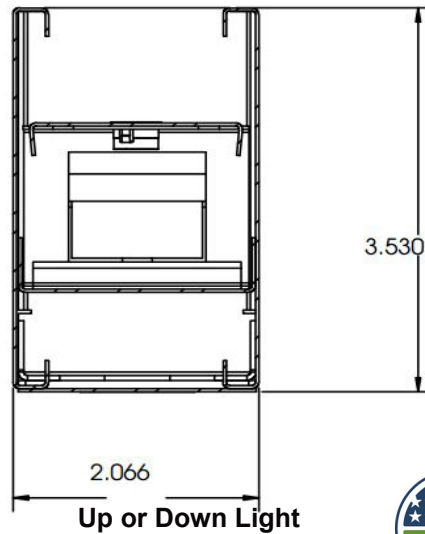

Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE