

### APPLICATIONS

Full body micro silhouette makes a bold statement with a minimal design in post painted matte white finish (consult factory for other finishes). Scaled to the LED module the frosted diffuser surrounds the LEDs for a soft lighting. Fixture can be surface mounted on the wall or ceiling or pendant mounted with specially engineered cable mounting kit.

### FEATURES & BENEFITS

- ◆ Housing is formed and welded 22 gauge steel, that is chemically treated and powder coated for a beautiful finish and to resist corrosion
- ◆ Can be mounted individually or in a continuous row
- ◆ Ribbed frosted lens is standard
- ◆ Knockouts on back and ends accept standard electrical fittings (by others). Consult factory.
- ◆ Surface mountable to a wall or ceiling
- ◆ Pendant or cable mountable
- ◆ Whips, fuses and cord sets. See options page in Buyers' Guide or contact the factory for more.
- ◆ ETL listed for damp locations




### ORDERING DATA

### EXAMPLE: LDA24-LEDF14RFMVWH40

LDA		LED		RF		Driver		Finish		Color Temperature	
Series	Dimensions	Gear	Wattage & Lumens		Diffuser	Driver		Finish		Color Temperature	
LDA	24 23.6" 48 47.2" 96 94.4"	LED	<b>24 Only</b>		RF Ribbed Frosted	DMV 120-277VAC	WH White (std)	30	3000K		
			12	12 Watts 1200 Lumens		Dimming	BK Black	35	3500K		
			15	15 Watts 1500 Lumens		Multivolt	SL Silver	40	4000K		
			20	20 Watts 2000 Lumens		0-10V	RD Red	50	5000K		
			<b>48 Only</b>				BN Brushed Nickel				
			24	24 Watts 2400 Lumens							
			30	30 Watts 3000 Lumens							
			40	40 Watts 4000 Lumens							
			<b>96 Only</b>								
			48	48 Watts 4800 Lumens							
			60	60 Watts 6000 Lumens							
			80	80 Watts 8000 Lumens							

**Dimensions:**  
 -3.93"H x 3.79"W x 23.60"L  
 -3.93"H x 3.79"W x 47.20"L  
 -3.93"H x 3.79"W x 94.40"L

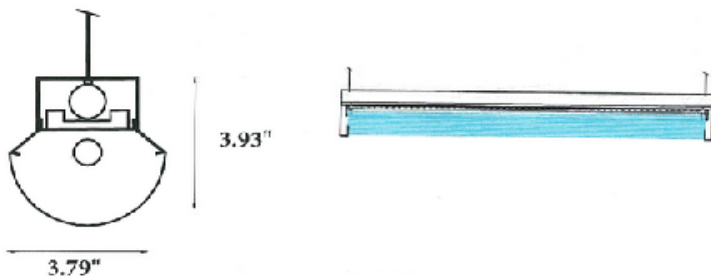

Dimensions and specifications subject to change without notice.

Options	
HC301WH	Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy
HC301WH5W	Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)
HC302WH	Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy
HC302WH5W	Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy (5 wire)
EM	Emergency battery pack 10W~1300 Lumens
OS	Occupancy Sensor

Plug in Options: For continuous run applications by simply plugging sections together  
**P11** 3 wire harness, including white, black and green  
**P12** 4 wire harness, including white, black, green and blue for emergency battery backup  
**P13D** 5 wire harness, including white, black, green, violet and gray

