


APPLICATIONS

A linear 4x5 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas, 4x5 Series fixtures can be installed individually or in a continuous run. Specifically designed for direct/indirect lighting with snap-in lens to hide the lamps or LED arrays. Ideal where downlight and uplight are required.

FEATURES & BENEFITS

- ◆ 4 ft. - 4" x 44.5" x 5.5"
- ◆ 8 ft. - 4" x 89.0" x 5.5"
- ◆ Accepts various lenses or louvers.
- ◆ Knockouts on ends allow continuous wireway mounting.
- ◆ Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable.

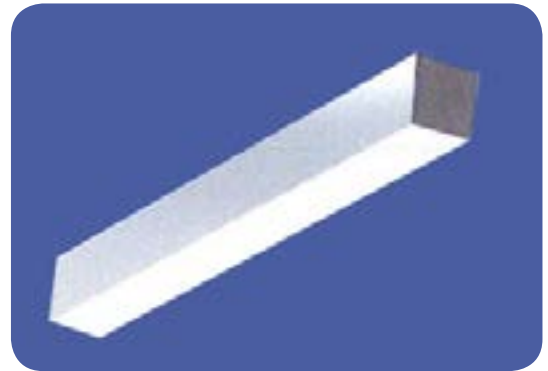

SPECIFICATIONS

Die-formed and welded 22 gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. Housing is specially designed for direct/indirect lighting with separating lamps compartments for each. Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers. Snap in reflector is ideal for uplight lens.

ORDERING DATA

EXAMPLE: LI45 48 MW LED 35 DMV WH 40


STANDARD

LI45		LED							
Series	Size	Gear	Wattage	Driver Type	Finish	Kelvin Temperature			
LI45W Wall Mount	48 4' Foot	LED	4 ft.	DMV Dimmable Driver 0-10V	WH White BK Black SI Silver	30K	3000K		
	96 8' Foot		35			24 Watts 3900 Lumens	35K	3500K	
LI45P Pendant Mount/ Surface Mount	Lens		46						
	MW	Matte white lens (std) Only available for down light	46 Watts 5000 Lumens						
	SF	Snap-in frosted acrylic lens (85% transmission) Special for LEDs	8 ft.						
			70	70 Watts 7000 Lumens					
		92	92 Watts 10000 Lumens						
Options									
				HC301WH	Cable kit with 4' cable & power feed/Cable incl. w/white canopy				
				HC302WH	Cable kit with 12' cable & power feed/Cable incl. w/white canopy				
				2SCS24WH	Two stem kits w/24" stem, canopy & mounting hardware for 4' fixture				


HIGH OUTPUT

LI45		LED							
Series	Size	Gear	Wattage	Driver Type	Finish	Kelvin Temperature			
LI45W Wall Mount	48 4' Foot	LED	4 ft.	DMV Dimmable Driver 0-10V	WH White BK Black SI Silver	30K	3000K		
	96 8' Foot		90			90 Watts 9050 Lumens	35K	3500K	
LI45P Pendant Mount	Lens		8 ft.						
	MW	Matte white lens (std) Only available for down light	180						
	SF	Snap-in frosted acrylic lens (85% transmission) Special for LEDs Only available for down light	180 Watts 18100 Lumens						
Options									
				HC301WH	Cable kit with 4' cable & power feed/Cable incl. w/white canopy				
				HC302WH	Cable kit with 12' cable & power feed/Cable incl. w/white canopy				
				2SCS24WH	Two stem kits w/24" stem, canopy & mounting hardware for 4' fixture				


Dimensions and specifications subject to change without notice.

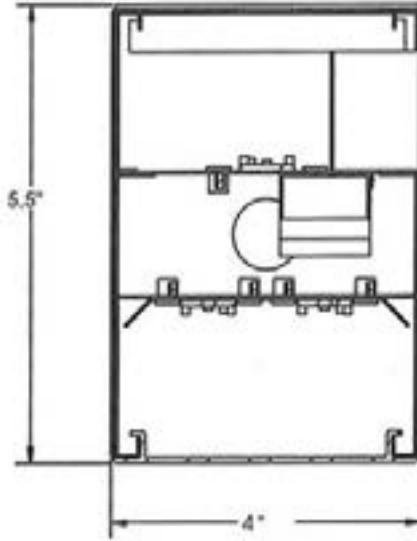

48"



96"



Dimensions and specifications subject to change without notice.