

### APPLICATIONS

Specification grade, low profile direct/indirect wall mount with up and forward throw optics, a sleek wall mount companion to the pendant mount indirect. This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors. Matches with our LPLI Series for a consistent look.

### FEATURES & BENEFITS

- ◆ Continuous row mounting
- ◆ Post Painted Powder Coat finish
- ◆ White standard, custom colors are available
- ◆ Wall bracket mount
- ◆ cETL<sub>us</sub> Listed for damp locations



### APPLICATIONS

Housing is die-formed and embossed code 20 gauge steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

### ORDERING DATA

### EXAMPLE: LIWMP-48LED48DMVWH40

LIW		LED		DMV		Options		
Series	Body Style	Gear	Wattage & Lumens	Driver	Finish	Color Temp	Options	
<b>LIW</b>	<b>MP</b> Perforated	<b>LED</b>	<b>4ft</b>	<b>DMV</b> 120-277VAC	<b>WH</b> White (std)	<b>30</b> 3000K	<b>EM</b> 10W, 1200 Lumen Battery Backup	
	<b>MS</b> White Lens							<b>35</b> 3500K
	<b>MB</b> Louver							<b>40</b> 4000K
	<b>MN</b> Solid							<b>50</b> 5000K
	<b>Size</b>		<b>8ft</b>		<b>SL</b> Silver		<b>EM5</b> 5W, 600 Lumen Battery Backup	
	<b>48</b> 48 inches		<b>48</b> 48 watts 4800 Lumens		<b>BZ</b> Bronze		<b>EM7</b> 7W, 900 Lumen Battery Backup	
	<b>96</b> 96 inches		<b>57</b> 57 watts 5400 Lumens					
			<b>97</b> 97 watts 9600 Lumens					
			<b>114</b> 114 watts 10800 Lumens					


Configuration	
<b>Blank</b>	End Caps Included
<b>-J</b>	Joiner - No End Caps Included

\*Lumens vary per body style and are approximate

### DIMENSIONS


#### 4-FOOT MODEL

#### TOP VIEW




#### 8-FOOT MODEL

#### TOP VIEW



Dimensions and specifications subject to change without notice.

#### END VIEW

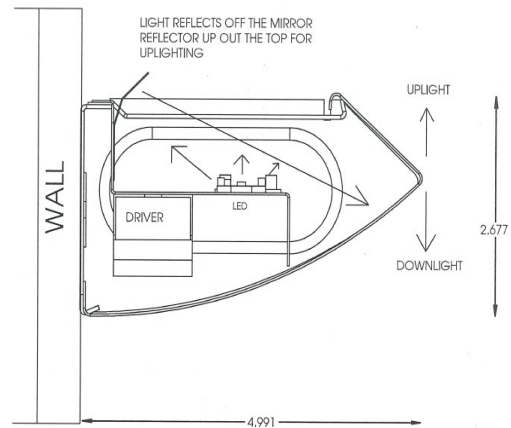

◆ 800-444-WATT ◆ www.mobern.com ◆

Stayton Dr., Ste. 500, Jessup, MD 20794 8200

#CAT

JOB NAME

TYPE