

**FEATURES & SPECIFICATIONS**

Mobern introduces an eye catching selection of LED Linear Lighting channels that can be surface or pendant mounted individually or in a continuous run that provides a line of light where you want it with unmatched styling and energy efficiency. Utilizing the latest in LED High Powered 24 Volt tape lighting sized exactly to the specific channel provides micro illumination that will not only highlight the area around it beautifully, but say "look here". Ideal for general lighting applications in both commercial and residential applications for circulation spaces, high impact areas and residentially over tables, kitchen islands and home offices. The versatility and clean styling makes this an ideal choice in many applications.

Each linear channel is available in popular sizes, 4 or 8 feet, or can be custom sized for your specific application within some small parameters or can be joined together for longer runs. Each channel requires a remote 24 volt driver sized to the wattage of the channel to power the LED tape.

This rectangle channel utilizes a snap in drop down lens to provide 534 lumens per foot at less than 10.5 watts.

**MATERIALS:**

Anodized aluminum channel is lightweight, small dimensions and dissipates heat well, designed especially for the LED tape. Highly tooled plastic end caps screw onto the aluminum channel and protect the channel the LED tape from dust and keep the LED tape clean and in optimum condition. A raceway in the back of the channel provides both a heat sink for the LED tape and a holder for screws to pendant mount the channels. The channels can be recessed mounted. The channels are factory or field cuttable to any length but exact length should be determined by the application and the exact length of LED tape that will provide smooth, consistent lighting throughout. Joiner splines are available to join channels together.


Snap in flush frosted lens is specially formulated for smooth illumination of the LED tape.

**ELECTRICAL:**


High powered and high quality LED tape is flexible and designed for high temperature resistant PCB. Tape provides 120° illumination in choice of two color temperatures, 3000k or 4000k. The LED tape has a 50,000 average life and is 24V. Tape comes in a 16 foot reel and is designed to be cut every 2 to 4 inches depending on the exact version. Clear 18 gauge electrical wire is soldered onto the LED tape and comes standard 10 feet. All LED tapes require a 24V remote driver, sold separately.

**WARRANTY:**

Five year limited warranty

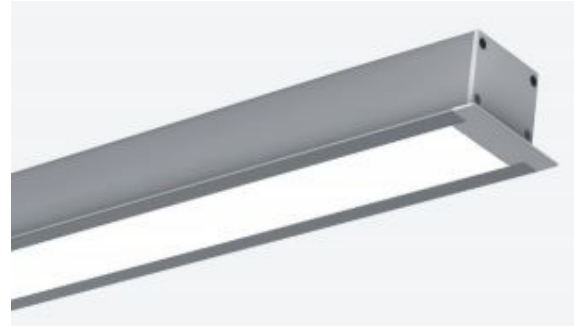


**DIMENSIONS**

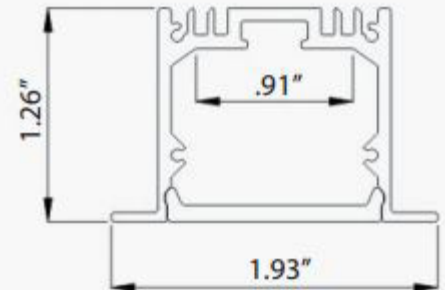

**COMPONENTS**

**LED Tape**

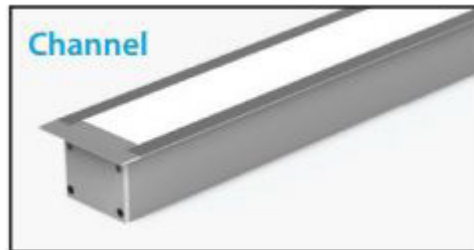


Dimensions and specifications subject to change without notice.

### MOUNTING:

Channels can be recessed mounted only. Recessed mounting requires specifying the Channel and LED tape separately so the channel can be mounted first with mounting clips. The LED tape will need to be ordered separately and then field installed.

Each channel provides installation of a remote driver wired to the electrical wiring provided with each channel. Channels can be combined to a single remote driver if total load does not exceed driver wattage rating.

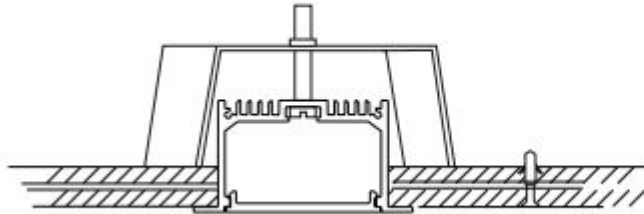

Mounting Clips



### DRIVERS (order separately):

Choice of constant voltage drivers including: 24V magnetic drivers from Magnitude which is dimmable with any standard MLV Triac dimmer or electronic driver from AC Electronic which is dimmable with 0-10V dimming. See Driver Specification sheets for details. These Class 2 remote power supplies in 24V are required and need to be wired to the channel's power cord in a junction box. Care should be taken to make sure the driver is mounted within the distance recommended to the channel itself for best performance. Wire gauge and driver alter the recommended distance. See Driver Specifications for more detail.

### ORDERING GUIDE

The LLCSR Series can be ordered in multiple ways to provide the most flexibility to meet your exact applications and enable the best value. Order complete unit (Aluminum channel with LED tape installed) in standard sizes or custom sizes (Available in small increments) with choice of remote drivers (Electronic for 0-10V applications or Magnetic for low voltage 2 wire applications).

Order Aluminum channel and LED tape separately to length in standard sizes or custom sizes (Available in small increments) with choice of remote drivers (Electronic for 0-10V applications for Magnetic of low voltage for 2 wire applications) for field installation of tape to channel. This option is ideal for surface mount applications and when multiple run lengths are required that need to be field measured at time of installation.

### Pendant Channels

**EXAMPLE: LLCSR47LED42SA40**

### ORDERING COMPLETE FIXTURE (Driver & Cable Kit sold separately)

LLCSR		LED		Finish		Color Temp	
Series	Lengths	Gear	Wattage/Lumens	Finish			
<b>LLCSR</b>	<b>47</b> 47"	<b>LED</b>	<b>42</b> 42 watts 2488 Lumens	<b>SA</b> Satin Aluminum	<b>30</b>	3000K	
2" Rectangle	<b>96</b> 96"		<b>83</b> 83 watts 4976 Lumens	-Consult for custom finish	<b>40</b>	4000K	
Recessed body							

Specifying Custom Size	^Determine the Size	**Calculate Wattage
	Choose any size from 3.35" to 98" in 3.35" increments __L - custom length in inches in 3.35" multiples	Wattage: Multiply length (in inches) x .88 Lumens: Multiply length (in inches) x 52 __W = 0.88 x __Inches    __L = 52.0 x __Inches

Dimensions and specifications subject to change without notice.

### ORDERING CHANNEL & TAPE COMPONENTS (individually)

**EXAMPLE: LLCSRE48SA**

#### EXTRUSION, LENS, END CAPS

LLCSRE		
Series	Lengths*	Finish
<b>LLCSRE</b> 2" Rectangle Recessed Body	<b>47</b> 47" <b>96</b> 97"	<b>SA</b> Satin Aluminum -Consult for custom finish
Specifying Custom Size	^Determine the Size	
	Choose any size from 3.35" to 98" in 3.35" increments __L - custom length in inches in 3.35" multiples	

**EXAMPLE: LLCSRT4823W24V30**

#### TAPE ONLY (Driver & Cable Kit sold separately)

LLCSRT					
Series	Lengths	Wattage**	Voltage	Color Temperature	
<b>LLCSRT</b>	<b>47</b> 47" <b>96</b> 96"	<b>42</b> 42 Watts <b>83</b> 83 Watts	<b>24V</b>	<b>30</b> 3000K <b>40</b> 4000K	

Specifying Custom Size	^Determine the Size		**Calculate Wattage	
	Choose any size from 3.35" to 98" in 3.35" increments __L - custom length in inches in 3.35" multiples		Wattage: Multiply length (in inches) x .88 Lumens: Multiply length (in inches) x 52 __W = 0.88 x __Inches      __L = 52.0 x __Inches	

#### Drivers (choice of magnetic or electric drivers)

Magnetic driver from Magnetude is dimmable with any standard MLV Triac Dimmer or Electronic driver from AC Electronic is dimmable with 0-10 Volt dimming. See driver specification sheets for details.

#### MOUNTING KITS (order separately)

Part Number	Description
HC601WH*	Cable kit with 6' cable and power feed/ Cable included & White canopy
HC602WH*	Cable kit with 12' cable and power feed/ Cable included & White canopy

Brand	Part Number	Max. Wattage	Dimensions	Remote Distance (max)
Magnitude	MTIM40L24DC	40W	5.6"Lx2.14"Wx2"H	20 Ft.
Magnitude	MTIM60L24DC	60W	6.55"Lx2.55"Wx2"H	15 Ft.
Magnitude	MTIM100L24DC	100W	6.55"Lx2.55"Wx2"H	10 Ft.
Magnitude	MTIM150L24DC	150W	6.55"Lx2.55"Wx2"H	5 Ft.
AC Electronic	ACA25VD24H104	25W	9.5"Lx21.7"Wx2"H	18 Ft.
AC Electronic	ACA60VD24H25	60W	9.5"Lx1.7"Wx2"H	18 Ft.
AC Electronic	ACA100VD24H41	100W	9.5"Lx2.4"Wx2"H	18 Ft.

Output voltage - 24 VDC



#### ACCESSORIES (order separately)

Part Number	Description
LLCSRCAPSA	Extra end caps, satin aluminum
LLCSRJOIN	Joiner to join two channels


Dimensions and specifications subject to change without notice.

### INSTALLATION INSTRUCTIONS

#### Recessed Mounted Only

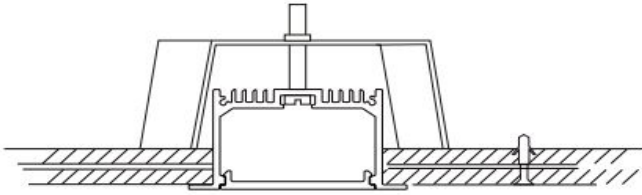


01  
**Cut the ceiling tile to size.**




02  
**Wire wall switch to driver and junction box.**




03  
**Drill hole for power cord.**




04  
**Screw end caps and put the mounting clips to channel.**




05  
**Wire the channel.**



06  
**Install the channel on the ceiling.**




07  
**Mount LED tape to channel with double sided tape.  
(LED Tape sold separately)**



08  
**Snap in lens.**



09  
**Turn on and ENJOY!**



10  
**Completed installation picture.**

Dimensions and specifications subject to change without notice.