


MOBERN

L I G H T I N G

SERIES LPLI

Low Profile Linear Lighting

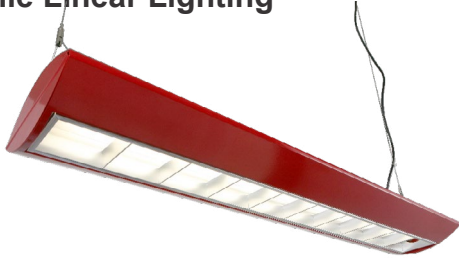

This LPLI Series is a subtle low-profile ellipsoidal pendant luminaire. Available in 96" and 48" modular lengths in individual or row configurations. For cable mounting only. End caps can be added to beginning of row, end of row or both ends of individual units. For continuous row mounting, wiring feeds through enclosed wireway. Sleek, compact, and low profile bullnose silhouette makes a dynamic design statement used individually or in graceful linear runs. When suspended, the Low Profile appears to float in the environment. Ideal for settings requiring generous overall illumination as well as controlled task lighting with the direct/indirect distributions.

- Standard 4' adjustable power cable (2 for 4' unit or 8' unit, included)
- White powder coated 23 gauge steel endcaps
- Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.
- UL listed for damp locations

CONSTRUCTION

Rugged steel housing with anti-rust protection powder coated white. Custom paint finishes available.

EZ-LED

EZ LED

Mobern's EZ LED is the most economical, practical and user friendly series of LED fixtures selling today. EZ LED provides users with high quality light, hassle free maintenance, and greater than 40% energy savings when compared to standard fluorescent options. These fixtures are UL Listed and arrive with the latest UL listed, LED T8 Bypass lamps installed. EZ LED fixtures do not contain a ballast, so you have the ability to change wattage and color temperature at any time by simply swapping out the lamps. Additionally, fixture performance can easily evolve over time simply by installing new LED T8 lamps incorporating advanced T8 LED lamp technology. Concerned about maintenance with an LED array and driver fixture? EZ LED solves that by utilizing a self-contained LED lamp that fits into our fixture just like a fluorescent lamp – maintenance is as simple as changing a lamp. EZ LED is simply the Easiest LED solution on the market today!!

Lamp Specifications:

Our T8 LED lamps are available in 2 or 4 ft sizes in different wattage, lumens and color temperature options. See lamp options and specs at www.mobern.com/EZLEDLamps.

50,000 Hour Life with 5 Year Warranty

Aluminum Base and Aluminum Housing with Glass Cover

Operating Temperature: - 20°C to 50°C

Color Temperature: 3500K, 4000K, 5000K

G13 Pins (Same as Fluorescent Linear T8 Bipin)

AC100 – 277V

Emergency Options:

The standard EZ LED Lamps require an inverter or an All-in-one emergency kit that includes LED array, battery and driver. Dimmable T8 LED with external driver works with standard LED EM it. See emergency options and specs at www.mobern.com/EZLEDEmergency.

ORDERING DATA

EXAMPLE: LPLI-232LEDL12W830KEYWH

LPLI											
Series	# Lamps	Lamp Type		Color Temp		Finish		Configuration		Options	
LPLI Low Profile Linear Lighting	2 2 Lamp 3 3 Lamp	32 48 inch T8 32TAN 96 inch T8	830 3000K 835 3500K 840 4000K 850 5000K	WH White SL Metallic Silver RD Red IN Iron BK Black	Blank Individual -B Beginner Run -E Ender Run -J Joiner	C12 12' Cable/Feed Kit CF Center power feed					
Lamp Wattage			Lamp Brand								
4 ft.			Blank House Brand Lamp LUN Lunera Brand KEY Keystone Brand								
LEDL12W	12.5 Watts	1750 Lumens	Keystone								
LEDL15W	15 Watts	1850 Lumens	Lunera								
LEDL15W	15 Watts	1800 Lumens									
LEDL18W	18 Watts	2100 Lumens									

SIZE W x L x H in inches

4ft. - 10.8 x 48 x 3.5

8ft. - 10.8 x 96 x 3.5

Dimensions and specifications subject to change without notice.



800-444-WATT ♦ www.mobern.com ♦
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE