

FEATURES & BENEFITS



- ◆ Ambient operating temperature -40°C (-40°F) to +40°C (105°F)
- ◆ Estimated 50,000 HRS L₇₀
- ◆ Thermally protected LED array
- ◆ Fitter neck acrylic diffuser
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ UL/cUL Listed for wet location
- ◆ 5 year warranty on 13D120
- ◆ 3 year warranty on 11MV



ORDERING DATA

EXAMPLE: MBPWLED11MV40WSJ

Series	Body	Gear	Wattage/Driver	Kelvin Temperature	Diffuser	Options
MBP Pocket LED	W White B Black	LED	11MV 11Watt Multivolt 120-277VAC 13D120 13Watt D120Volt Triac Dimmable	30 3000K* 40 4000K <small>*only available in 13D120</small>	WSJ White Small Jar CSJ Clear Small Jar AG Clear Globe	PC Photocell** <small>**only available in 13D120</small>

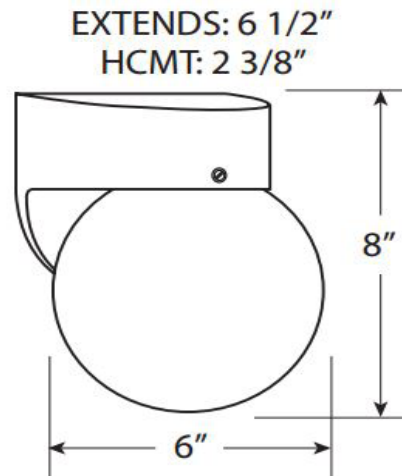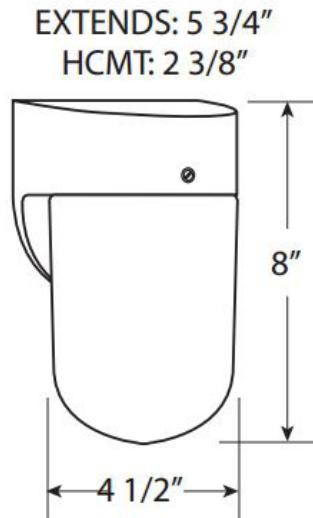

Dimensions and specifications subject to change without notice.