

FEATURES & BENEFITS

ILLUMINATION

- ◆ Two fixed optics 5.4 watt, glare-free lamp heads
- ◆ Smooth thermoplastic reflector and plastic lens for optimal light distribution

ELECTRICAL

- ◆ Dual 120/277 voltage
- ◆ Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- ◆ 6V maintenance-free, rechargeable sealed LED acid battery
- ◆ Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- ◆ Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- ◆ LVD (Low Voltage Disconnect) prevents battery from deep discharge

MOUNTING

- ◆ Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- ◆ Suitable for wall or ceiling mount

HOUSING

- ◆ Injection-molded, engineering grade, 5VA flame retardant, high impact resistant, thermoplastic in white or black finish




WARRANTY / LISTING


- ◆ Five year warranty on all electronics and housing. Battery prorated for five years
- ◆ Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- ◆ ETL listed for damp locations

ORDERING DATA

EXAMPLE: MEBELP2B

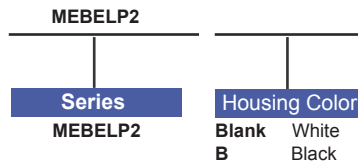

DIMENSIONS

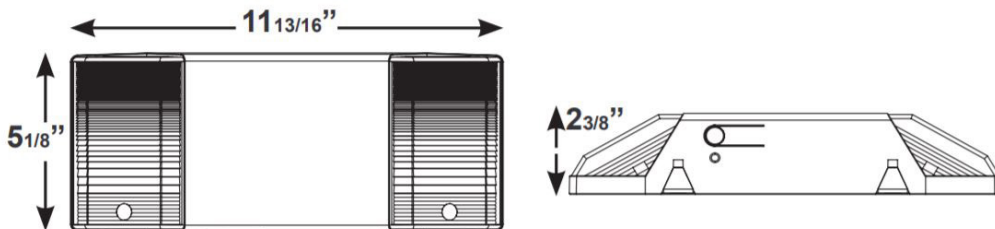

Dimensions and specifications subject to change without notice.



| | |
|----------|------|
| CAT# | |
| JOB NAME | TYPE |