


## SPECIFICATIONS


- 120-277V INPUT VOLTAGE, 50/60Hz
- 4 CREE LED ARRAY (10W)
- 10W, 912 LUMENS
- 80 LPW\*\*
- 4000 KELVIN
- 74 CRI (TYP)
- CONSTANT CURRENT AT 700 mA
- DRIVER UL CLASS 2, POWER FACTOR > .90
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +40°C (105°F)
- ESTIMATED 50,000 HRS L<sub>70</sub>\*
- THERMALLY PROTECTED LED ARRAY
- POWDERCOATED ALUMINUM BACK PAN
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- WALL MOUNT ONLY
- UL/CUL LISTED FOR WET LOCATION




**MEOG**

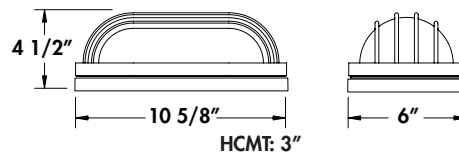


**MEO**



**MEOS**

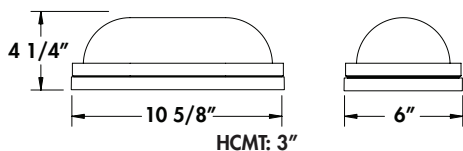

**MEOC**

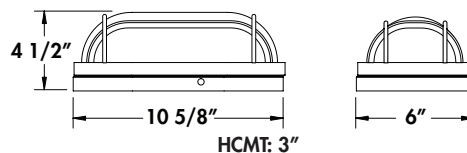

|  | LED  |                        | WH                    | 10            | MV            | 40         |  |
|--|------|------------------------|-----------------------|---------------|---------------|------------|--|
| Series   | Gear | Fixture                | Lens                  | Wattage       | Voltage       | Kelvin     | Options  |
| MEO = Oval<br>MEOG = Grill<br>MEOS = Hood<br>MEOC = Grid | LED  | B = Black<br>W = White | FW = Frosted<br>White | 10 = 10 Watts | MV = 120-277V | 40 = 4000K | P = Photocell<br><br>Photocells are only available for 120V applications |

|                              |
|------------------------------|
| MARINE LED REPLACEMENT PARTS |
| 10LR4R = 4 CREE LED ARRAY    |
| IG900-DMV-1 = LED DRIVER     |

\* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST  
 \*\* ESTIMATED FROM LED SOURCE

Specifications subject to change without notice. Printed in U.S.A. © 2013 Mobern Lighting Company

