


Series MIFLTII

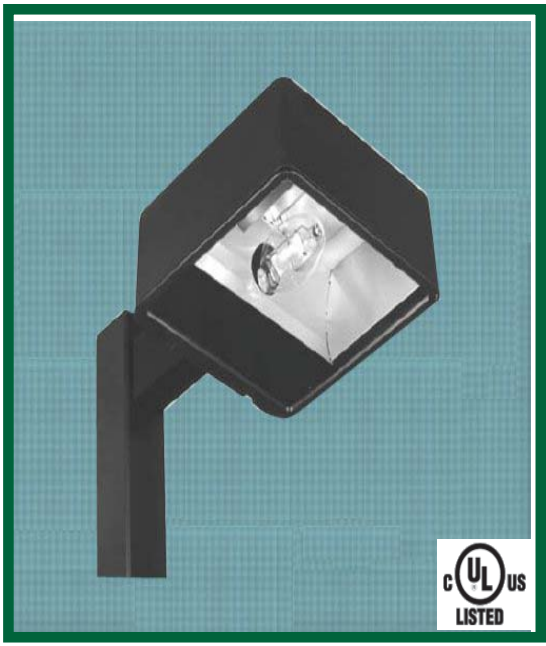

TYPE II

FIXTURE HOUSING

Seamless, die cast aluminum.

Door Frame

Hinged, die cast aluminum.

Lens

Clear, heat, and impact resistant tempered glass.

Optics

Segmented.

Finish

Durable powder coat finish.
Standard colors: Bronze, Black, or White. Custom colors on request.

Listings

ETL listed for wet locations

Two Sizes

"16"x16"x6.75"

"22"x22"x9.25"

EPA Ratings

16" Housing 0° Tilt - EPA: .95

16" Housing 20° Tilt - EPA: 1.27

16" Housing 60° Tilt - EPA: 1.78

22" Housing 0° Tilt - EPA: 1.64

22" Housing 20° Tilt - EPA: 2.34

22" Housing 60° Tilt - EPA: 3.26

MI2AF



2" Adjustable Knuckle Fitter

TYPE II ORDER INFORMATION

SIZE	CATALOG#	WATTAGE	SIZE	CATALOG#	WATTAGE
16"	MIMDFLTII150HPSQV	150W-HPS-QV-CWA	22"	MILGFLTII1000HPSQV	1000W-HPS-QV-CWA
16"	MIMDFLTII150HPS480	150W-HPS-480-CWA	22"	MILGFLTII1000HPS480	1000W-HPS-480-CWA
16"	MIMDFLTII250HPSQV	250W-HPS-QV-CWA	22"	MILGFLTII1000MHQV	1000W-MH-QV-CWA
16"	MIMDFLTII250HPS480	250W-HPS-480-CWA	22"	MILGFLTII1000MH480	1000W-MH-480-CWA
16"	MIMDFLTII400HPSQV	400W-HPS-QV-CWA	22"	MILGFLTII1000MHPSQV	1000W-MH-PS-QV-SCWA
16"	MIMDFLTII400HPS480	400W-HPS-480-CWA	22"	MILGFLTII1000MHPS480	1000W-MH-PS-480-SCWA
16"	MIMDFLTII1150MHPSQV	150W-MH-PS-QV-SCWA			
16"	MIMDFLTII1150MHPS480	150W-MH-PS-480-SCWA			
16"	MIMDFLTII175MHPSQV	175W-MH-PS-QV-SCWA			
16"	MIMDFLTII175MHPS480	175W-MH-PS-480-SCWA			
16"	MIMDFLTII250MHPSQV	250W-MH-PS-QV-SCWA			
16"	MIMDFLTII250MHPS480	250W-MH-PS-480-SCWA			
16"	MIMDFLTII400MHPSQV	400W-MH-PS-QV-SCWA			
16"	MIMDFLTII400MHPS480	400W-MH-PS-480-SCWA			

OPTIONS


- MIS101 Polycarb Vandal Guard Medium Housing
- MIS102 Polycarb Vandal Guard Large Housing
- MIS104 Wire Guard Medium Housing
- MIS105 Wire Guard Large Housing

PULSE START BALLAST = PS
PULSE ARC PACKAGES AVAILABLE
POWER FACTOR CORRECTING CAPACITATOR AVAILABLE
SEE BELOW FOR ARM FITTING SPECIFICATIONS
Please contact your Mobern Lighting representative for more information.


MISSA-S 2"
MISSA-M 8"
MISSA 10.75"



MISSA 10.75" Aluminum Arm
MISSA-M 8" Aluminum Arm
MISSA-S 2" Aluminum Arm

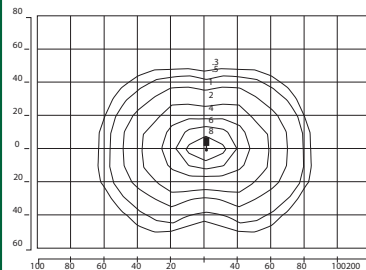

Isofootcandle plot of 400W
HPS mounted at 25' w/ 0° tilt.

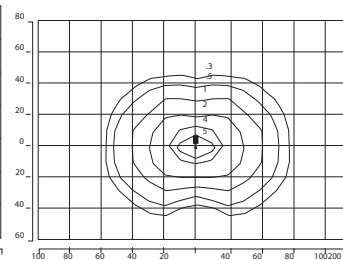

Isofootcandle plot of 400W
MH mounted at 25' w/ 0° tilt.

****ARM FITTING SPECIFICATIONS**
16" Housing requires SSA or SSA-M for multiple units placed at 90°.
22" Housing requires SSA for multiple units placed at 90°.
Other housing and arm configurations are available. Please contact your Mobern Lighting Sales Representative for more information.



♦ 800-444-WATT ♦ mobern.com ♦

© 2008 Mobern Lighting Company

CAT#

JOB NAME

TYPE