

APPLICATIONS

The MILGWPKLED Wall Pack is ideal for security, accent and perimeter lighting. Applications include entrance ways, garages, and commercial buildings.

FEATURES & BENEFITS

- ◆ Uses up to 88% less energy than HID equivalent
- ◆ 3-5x longer life than fluorescent or HID systems
- ◆ Mercury and UV free with RoHS certified LEDs
- ◆ Instant On/Off
- ◆ Heavy Duty Die Cast Aluminum Housing
- ◆ IP65/NEMA 4X
- ◆ Heavy duty die cast aluminum mounting plate
- ◆ Bronze powder-coat finish
- ◆ Borosilicate glass lens with hinged door or polycarbonate lens
- ◆ Optional photocell for easy field installation
- ◆ Consult for DLC
- ◆ cETL_{us} or UL Listed (wet location)



42W - 135W

Replaces
Up to 400WMH



ORDERING DATA

EXAMPLE: MILGWPKLED42MV40C

MILGWPK	LED					
Series	Gear	Wattage/Lumens		Driver*	Color Temp*	Options
MILGWPK LED Large Wall Pack	LED	42 42 Watts	4363 Lumens	MV 120 - 277VAC	30 3000K	OC Occupancy Sensor
		56 56 Watts	5818 Lumens	DMV Multivolt	40 4000K	PC120 Photo Cell, 120V
		90 90 Watts	11200 Lumens	120-277VAC	50 5000K	PC277 Photo Cell, 277V
		135 135 Watts	16400 Lumens	0-10V Dimmable	55 5500K	EM Emergency*

*See chart for availability

SPECIFICATIONS

Model	Input Watts	CRI	Color Temp x100 (K)	Dimmable	Lens	EM	Replaces	UL/ETL	BAA Compliant
MILGWPKLED42MVxx	42W	>80	30,40,50,55	Optional	Glass	Yes	175W	ETL	Yes
MILGWPKLED56MVxx	56W	>80	30,40,50,55	Optional	Glass	Yes	250W	ETL	Yes
MILGWPKLED90MVxx	90W	>70	40, 50	No	Polycarbonate	No	400W	UL	No
MILGWPKLED135MVxx	135W	>70	40, 50	No	Polycarbonate	No	400W+	UL	No

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆



8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE


DIMENSIONS

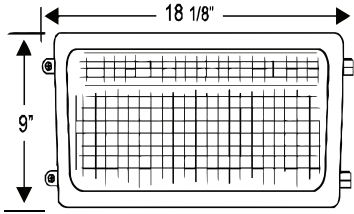


PHOTOMETRIC REPORT

MILGWPKLED90W11200LMV50K

Luminous Intensity Distribution Curve

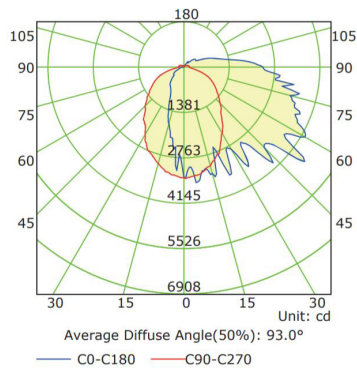


Illuminance at a Distance

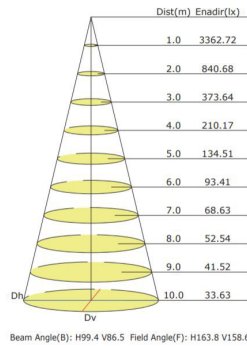


MILGWPKLED135W16400LMV50K

Luminous Intensity Distribution Curve

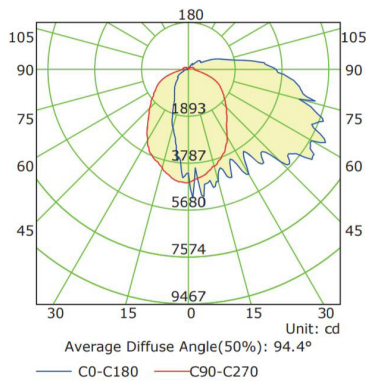

Illuminance at a Distance

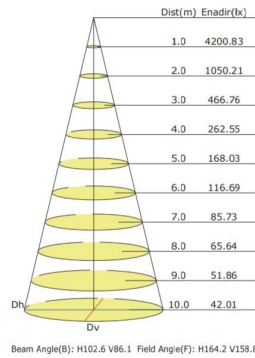

Dimensions and specifications subject to change without notice.

