

### APPLICATIONS

The **MIMDWPK LED Wall Pack** is ideal for security, accent and perimeter lighting. Applications include entrance ways, garages, and commercial buildings. Housing is die-cast aluminum body. Standard finish is bronze. Heat and shock resistant borosilicate glass refractor permanently bonded to lens frame. Back plate with cast-in knockouts for alignment with all standard recessed boxes.

### FEATURES & BENEFITS

- ◆ Heavy Duty Die Cast Aluminum Housing
- ◆ IP65/NEMA 4X
- ◆ Heavy duty die cast aluminum mounting plate
- ◆ Bronze powder-coat finish
- ◆ Optional photocell for easy field installation
- ◆ Borosilicate glass lens with hinged door or polycarbonate lens
- ◆ cETL<sub>us</sub> or UL Listed (wet location)



14W - 80W

Replaces  
Up to 400W

**IP65**  
CERTIFIED

### ORDERING DATA

EXAMPLE: MIMDWPKLED14MV40

MIMDWPK	LED	Wattage/Lumens		Driver*	Color Temp*	Options
Series	Gear					
<b>MIMDWPK</b> LED Wall Pack	<b>LED</b>	<b>14</b>	14 Watts 1380 Lumens	<b>MV</b> 120 - 277VAC Multivolt	<b>30</b> 3000K <b>40</b> 4000K	<b>PC120</b> Photo Cell, 120V <b>PC277</b> Photo Cell, 277V <b>EM</b> Emergency
		<b>28</b>	28 Watts 2660 Lumens	<b>DMV</b> 120-277VAC 0-10V Dimmable	<b>50</b> 5000K <b>55</b> 5500K	
		<b>37</b>	37 Watts 3450 Lumens			
		<b>42</b>	42 Watts 4210 Lumens			
		<b>45</b>	45 Watts 5300 Lumens			
		<b>56</b>	56 Watts 5590 Lumens			
		<b>70</b>	70 Watts 8100 Lumens			

\* See chart for availability


### SPECIFICATIONS

Model	Input Watts	CRI	Color Temp x100 (K)	Dimmable	Lens	EM	Replaces	UL/ETL	BAA Compliant
MIMDWPKLED14MVxx	14W	>85	30,40,50,55	Optional	Glass	Yes	Up to 100W	ETL	Yes
MIMDWPKLED28MVxx	28W	>85	30,40,50,55	Optional	Glass	Yes	Up to 175W	ETL	Yes
MIMDWPKLED37MVxx	37W	>70	50	No	Polycarbonate	No	Up to 250W	UL	No
MIMDWPKLED42MVxx	42W	>85	30,40,50,55	Optional	Glass	Yes	Up to 250W	ETL	Yes
MIMDWPKLED45MVxx	45W	>70	40, 50	No	Polycarbonate	No	Up to 250W	UL	No
MIMDWPKLED56MVxx	56W	>70	30, 40, 50, 55	Optional	Glass	Yes	Up to 250W	ETL	Yes
MIMDWPKLED70MVxx	70W	>70	40, 50	No	Polycarbonate	No	Up to 400W	UL	No

Dimensions and specifications subject to change without notice.




**DIMENSIONS**

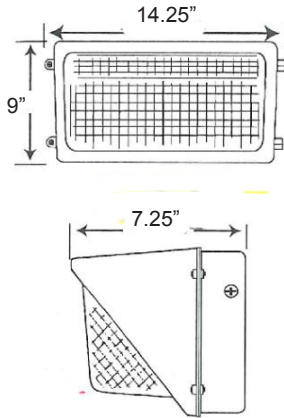


**PHOTOMETRIC REPORT**

**MIMDWPKLED45W5300LMV50K**

**Luminous Intensity Distribution Curve**

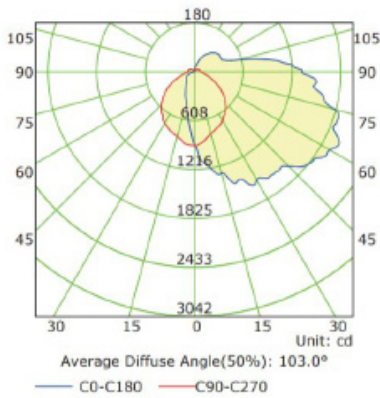


**Illuminance at a Distance**

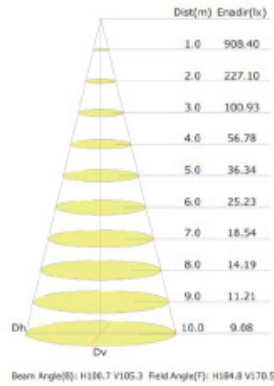


**MIMDWPKLED70W8100LMV50K**

**Luminous Intensity Distribution Curve**

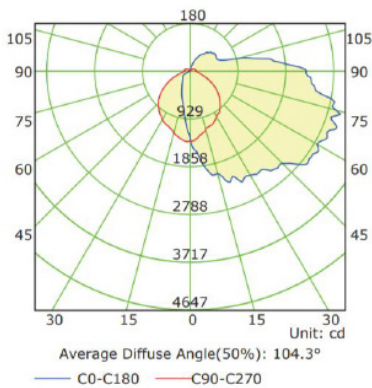

**Illuminance at a Distance**

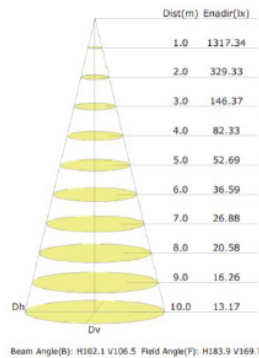

Dimensions and specifications subject to change without notice.

