


### FEATURES & BENEFITS

- ◆ Seamless, die-cast aluminum
- ◆ Hinged, die-cast aluminum door frame
- ◆ Clear lens, heat and impact resistant tempered glass
- ◆ 12" & 22" segmented. 16" hydroformed.
- ◆ Durable powder coat finish
- ◆ Standard colors: Bronze, Black, White. Custom colors on request
- ◆ ETL Listed for wet locations

### Sizes

12" x 12" x 6.25"  
16" x 16" x 6.75"  
22" x 22" x 9.25"

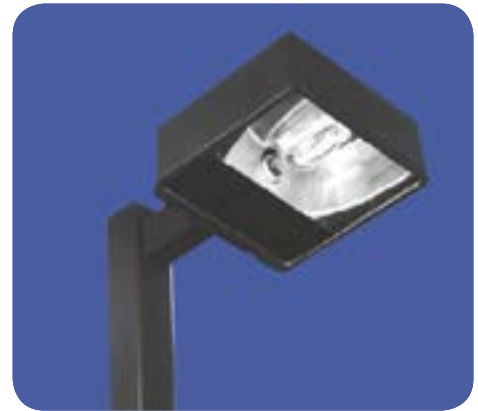

### M2AF

2" Adjustable  
Knuckle Fitter



### MISSA

MISSA 10.75" Aluminum Arm  
MISSA 8" Aluminum Arm  
MISSA 2" Aluminum Arm

### Forward Throw Order Information

Size	Catalog #	Wattage	Size	Catalog #	Wattage
12"	MISMPR50HPS	50W-HPS-120-NPF	16"	MIMDPR400HPSQV	400W-HPS-QV-CWA
12"	MISMPR70HPS	70W-HPS-120-NPF	16"	MIMDPR400HPS480	400W-HPS-480-CWA
12"	MISMPR100HPS	100W-HPS-120-NPF	16"	MIMDPR150MHPSQV	150W-MH-PS-QV-SCWA
12"	MISMPR150HPS	150W-HPS-120-NPF	16"	MIMDPR150MHPS480	150W-MH-PS-480-SCWA
12"	MISMPR150HPSQV	150W-HPS-QV-CWA	16"	MIMDPR175MHPSQV	175W-MH-PS-QV-SCWA
12"	MISMPR150HPS480	50W-MH-PS-480-CWA	16"	MIMDPR175MHPS480	175W-MH-PS-480-SCWA
12"	MISMPR50MHPSQV	50W-MH-PS-QV-SCWA	16"	MIMDPR250MHPSQV	250W-MH-PS-QV-SCWA
12"	MISMPR70MHPSQV	70W-MH-QV-SCWA	16"	MIMDPR250MHPS480	250W-MH-PS-480-SCWA
12"	MISMPR100MHPSQV	100W-MH-QV-SCWA	16"	MIMDPR400MHPSQV	400W-MH-PS-QV-SCWA
12"	MISMPR150MHPSQV	150W-MH-PS-QV-SCWA	16"	MIMDPR400MHPS480	400W-MH-PS-480-SCWA
12"	MISMPR150MHPS480	150W-MH-PS-480-SCWA	22"	MILGPR1000HPSQV	1000W-HPS-QV-CWA
12"	MISMPR175MHPSQV	175W-MH-QV-SCWA	22"	MILGPR1000HPS480	1000W-HPS-480-CWA
12"	MISMPR175MHPS480	175W-HPS-480-SCWA	22"	MILGPR1000MHQV	1000W-MH-QV_CWA
16"	MIMDPR150HPSQV	150W-HPS-QV-CWA	22"	MILGPR1000MH480	1000W-MH-480-CWA
16"	MIMDPR150HPS480	150W-HPS-480-CWA	22"	MILGPR1000MHPSQV	1000W-MH-PS-QV-SCWA
16"	MIMDPR250HPSQV	250W-HPS-QV-CWA	22"	MILGPR1000MHPS480	1000W-MH-PS-480-SCWA
16"	MIMDPR250HPS480	250W-HPS-480-CWA			

Pulse Start Ballast = PS

Pulse Arc Packages Available

\*Power factor correcting capacitor available

\*\*See below for arm fitting specifications

### ACCESSORIES

MIMDPR-WG Wireguard  
MIMDPR-VS Visor

### \*\*ARM FITTING SPECIFICATIONS

12" Housing requires SSA or SSA-M for multiple units place at 90°

16" Housing requires SSA or SSA-M for multiple units place at 90


22" Housing requires SSA for multiple units place at 90

Other housing and arm configurations are available. Please contact Mobern Lighting Sales Representative for more information.


### EFA Ratings

12" Housing -0° Tilt -EPA .55	16" Housing -60° Tilt -EPA 1.78
12" Housing -20° Tilt -EPA .77	22" Housing -0° Tilt -EPA 1.64
12" Housing -60° Tilt -EPA 1.07	22" Housing -20° Tilt -EPA 2.34
16" Housing -0° Tilt -EPA .95	22" Housing -60° Tilt -EPA 3.26
16" Housing -20° Tilt -EPA 1.27	


Dimensions and specifications subject to change without notice.

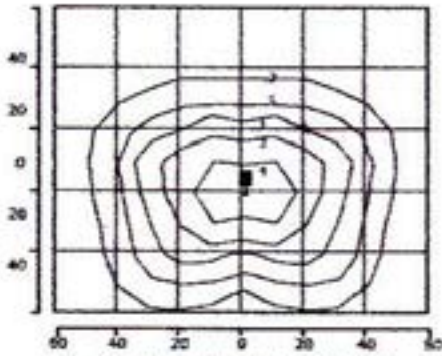


Isofootcandle plot of 150W HPS mounted at 15' w/ 0° tilt.

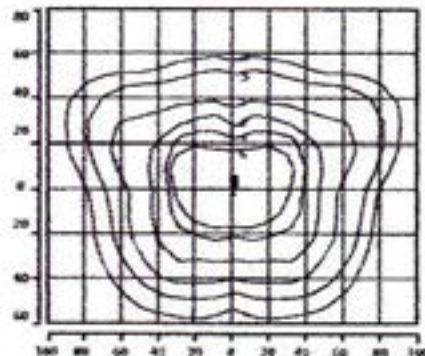


Isofootcandle plot of 400W HPS mounted at 25' w/ 0° tilt.

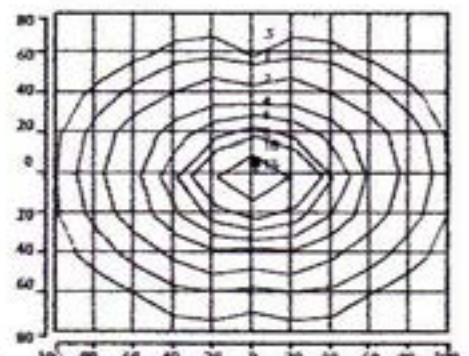


Isofootcandle plot of 1000W HPS mounted at 30' w/ 0° tilt.

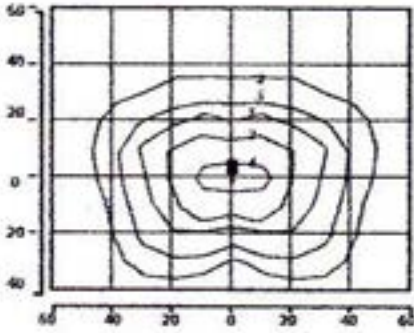

Isofootcandle plot of 175W MH mounted at 15' w/ 0° tilt.

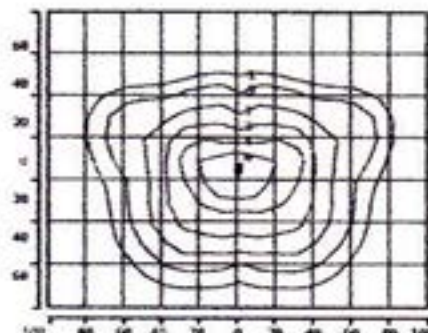

Isofootcandle plot of 400W MH mounted at 25' w/ 0° tilt.

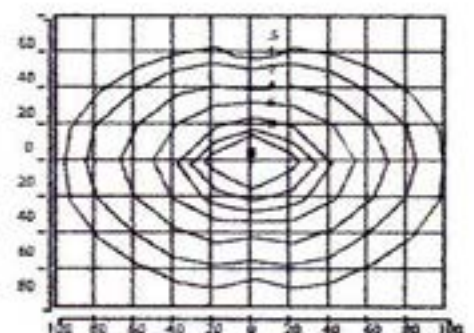

Isofootcandle plot of 1000W MH mounted at 30' w/ 0° tilt.

Dimensions and specifications subject to change without notice.