

### FEATURES & BENEFITS

- ◆ Ambient operating temperature -40°C (-40°F) to +50°C (122°F)
- ◆ Estimated 50,000 Hrs L<sub>70</sub>
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ Acrylic diffuser
- ◆ Post top version fits most 3 inch diameter posts (not included)
- ◆ UL Listed for wet locations
- ◆ Energy Star Listed in wall and long tail versions
- ◆ 5 year warranty




### ORDERING DATA


EXAMPLE: MKRPWHLED13D120WH30

MKR	LED	13	D120					
Series	Mount	Lens	Gear	Wattage / Lumens	Driver	Finish	Color Temp	Options
<b>MKR</b>	<b>P</b> Post Top <b>W</b> Wall Mount <b>L</b> Wall Mount Long Tail	<b>WH</b> White <b>CL</b> Clear	<b>LED</b>	<b>13</b> 13 Watts 1000 Lumens <small>Estimated from LED Source</small>	<b>D120</b> 120VAC Triac Dimmable	<b>WH</b> White <b>BK</b> Black	<b>30</b> 3000K <b>40</b> 4000K	<b>PC</b> Photocell* <small>*Photocell Not Available on Post Top</small>


Long Tail Wall Mount

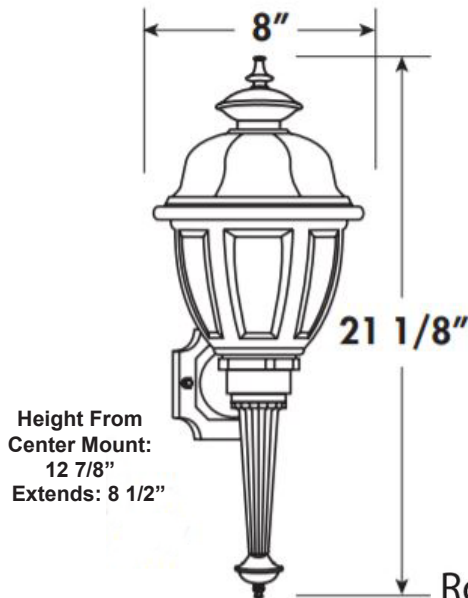

Wall Mount

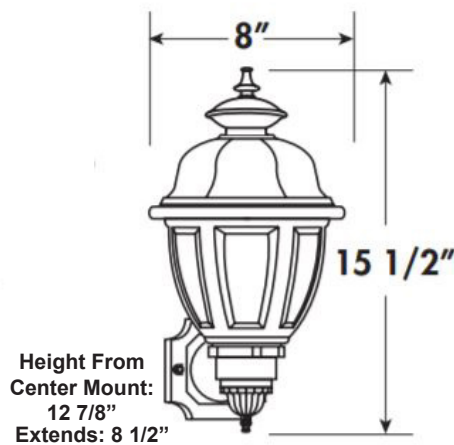

Post Top

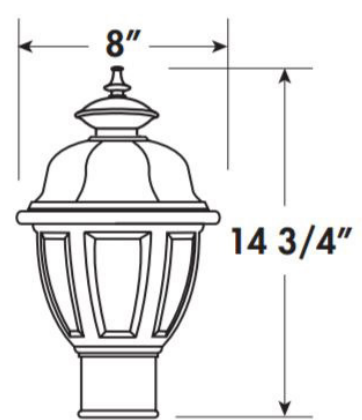

Dimensions and specifications subject to change without notice.