

FEATURES & BENEFITS

- ◆ Ambient operating temperature -40°C (-40°F) to +40°C (105°F)
- ◆ Estimated 50,000 HRS L₇₀
- ◆ Thermally protected LED array
- ◆ Molded of durable non-corrosive UV resistant resins
- ◆ ^cUL_{US} Listed for damp location
- ◆ Min CRI > 80




ORDERING DATA

EXAMPLE: MOCL10LED13D120WH30

Series	Size	Gear	Wattage/Driver*	Housing Color	Color Temp
MOCL Outdoor Octagon	10 10 inches	LED	13D120 13Watt D120Volt Triac Dimmable 14D120 14Watt D120Volt Triac Dimmable 23D120 23Watt D120Volt Triac Dimmable *consult for Lumen packages	WH White BK Black	30 3000K 40 4000K

Series	Size	Socket	Lamp Type	Housing Color	Color Temp
MOCL Outdoor Octagon Series	10 10 inches	INC Incandescent	LED 10Watt A19/E26 120VAC 800 Lamp Lumens Triac Dimmable	WH White BK Black	27 2700K 40 4000K

DIMENSIONS

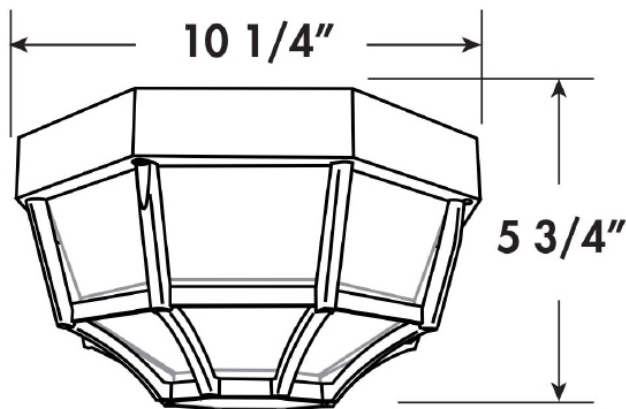

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 100, Jessup, MD 20794

CAT#	
JOB NAME	TYPE