

APPLICATIONS

The MWCED cylinders are wet location and IP65 rated for outdoor use. These wall mount cylinders come in two versions: down light only and up & down light. These fixtures are designed to operate in environments between -22°F to 104°F (-30°C to 40°C), and are excellent for applications where a harsh environment is concerned.

FEATURES & BENEFITS

- ◆ All aluminum construction, powder coat painted in white, black, or silver finish for harsh weatherproof applications
- ◆ Wall mount directly on surface using appropriate anchor bolts or screws (not included)
- ◆ Min CRI 80
- ◆ IP65 Rated
- ◆ ^CCSA_{US} listed for wet locations
- ◆ 3 year warranty on housing
- ◆ 5 year warranty on LED module




ORDERING DATA

EXAMPLE: MWCED4LEDD15D120BK30

MWCED		LED		D120			
Series	Size	Gear	Up-Light/Down-Light	Wattage/Lumens	Driver	Finish	Color Temp
MWCED Wall Cylinder	4 4 inches	LED	D Downlight Only 1U1D 50% Uplight 50% Downlight	Downlight Only 15 15 Watts 1190 Lumens 20 20 Watts 1415 Lumens 30 30 Watts 2110 Lumens Up and Down Light 30 30 Watts 2380 Lumens 40 40 Watts 2830 Lumens 60 60 Watts 4220 Lumens	D120 120VAC Tria Dimmable	BK Black SI Silver WH White	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K

DIMENSIONS

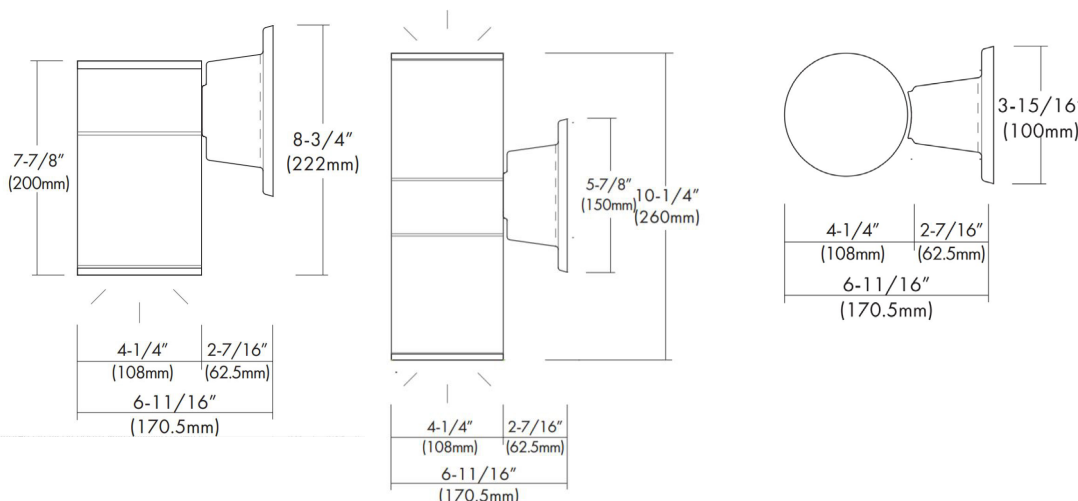

120V Approved Dimmers

- *Lutron: Skylark S-600
: MRF2-6DN-120
: MACL-153M
: DVLV-600P
: SELV-300P
: CTCL-153P
: DVELV-303P
: DVCL-153P
- *Leviton: D600R, Acenti: Ate06, Trimatron #705W
- *Cooper Devine incandescent dimmer 600W
Pass&seymour harmony incandescent 600W

Dimensions and specifications subject to change without notice.