

### APPLICATIONS

Microperforated baffle with white opal acrylic inlay combines soft downlight with even ceiling illumination. New Engineered Lighting design delivers more downlight illumination than standard pendant mounted fixtures. Hinged baffle for quick, easy lamp access. Optional joiner assembly for continuous runs and tandem configurations. A low-profile suspended direct/indirect fixture for attractive glare-free ambient lighting in offices, conference rooms, reception areas, classrooms and video display terminal workspaces.

### FEATURES & BENEFITS

- ◆ 2 or 3 lamp positions
- ◆ Designed for dual cable, pendant or chain mounting.
- ◆ White opal acrylic diffuser.
- ◆ Molded multicavity ABS white plastic
- ◆ Every fixture is individually tested

### SPECIFICATIONS

Die-formed heavy gauge prepainted cold rolled steel. Baffle of 22 gauge cold rolled steel with 5/64" diameter microperforations at staggered 7/64" intervals. Listed by and bears **UL** label.



Available in brushed nickel (BN) or other custom finishes

### ORDERING DATA

### EXAMPLE: PBLI-232WHMVC1BK

PBLI		32									
Series	Lamp Position	Lamp Type	Tandem Code	Finish	Ballast Type	Cable Kit	Cord & Canopy Finish				
PBLI	2 2 Lamp 3 3 Lamp *Lamps not included	32 48" T8	Blank 4 ft. TAN 8 ft. Tandem	WH White BN Brushed Nickel	MV Multivolt 120 Volt 277 Volt R120 Residential 120V PMV Program Multivolt	Blank 4 ft cable kit C1 12 ft. cable kit	Blank White (Standard) BK Black BKWH Black cord & white canopy				

#### Brands

Code No.	Description	Ballast			
A	Advance	Manufacturer	Standard - Leave blank if no preference	High Efficiency Instant Start	High Efficiency Program Start
G	GE Ballast	Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN ???)
L	Lutron	<b>Performance Levels</b>			
S	Sylvania Ballast	GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
U	Universal	Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
		Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)

#### Options

- B1 T8/T5 1L 500 Lumens Battery Backup (B11)
- B2 T8/T5 1L/2L 700 Lumens Battery Backup (B48)
- B3 T8/T5 1L/2L 1400 Lumens Battery Backup (B223)
- B51 T5HO 1L 500 Lumen Battery Backup (B625)
- B52 T5HO 1L 800 Lumens Battery Backup (B585)
- B53 T5HO 1L 1300 Lumens Battery Backup (B626)
- 11 Dual Ballasts 1 Lamp + 1 Lamp
- 21 Dual Ballasts 2 Lamp + 1 Lamp
- 22 Dual Ballasts 2 Lamp + 2 Lamp
- 31 Dual Ballasts 3 Lamp + 1 Lamp


Battery Backup (#) if ordering separately.  
\*Call factory for additional options  
\*Lamps purchased separately

Dimensions and specifications subject to change without notice.

#### PHOTOMETRICS

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	19%
Wall	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
RCR Zonal Cavity Coefficients 209 Spacing ratio. Along 1.2 Across 1.4																	
1	.77	.77	.77	.77	.69	.69	.69	.69	.54	.54	.54	.40	.40	.40	.28	.28	.28
2	.70	.67	.64	.62	.63	.60	.58	.56	.47	.46	.44	.35	.34	.33	.24	.24	.23
3	.64	.59	.54	.50	.57	.53	.49	.46	.41	.39	.37	.31	.29	.28	.21	.20	.20
4	.58	.52	.46	.42	.52	.46	.42	.38	.37	.33	.31	.28	.25	.24	.19	.18	.17
5	.54	.46	.40	.35	.48	.41	.36	.32	.33	.29	.26	.25	.22	.20	.17	.16	.15
6	.49	.41	.35	.30	.44	.37	.31	.28	.29	.25	.22	.22	.19	.17	.15	.14	.13
7	.45	.36	.30	.26	.40	.33	.28	.24	.26	.22	.20	.20	.17	.15	.14	.12	.11
8	.42	.33	.27	.23	.37	.30	.24	.21	.23	.20	.17	.18	.15	.13	.12	.11	.10
9	.29	.30	.24	.20	.34	.27	.22	.18	.21	.18	.15	.16	.14	.12	.11	.10	.08
10	.36	.27	.21	.18	.32	.24	.19	.16	.19	.16	.13	.15	.12	.10	.10	.09	.07


Zonal Lumens

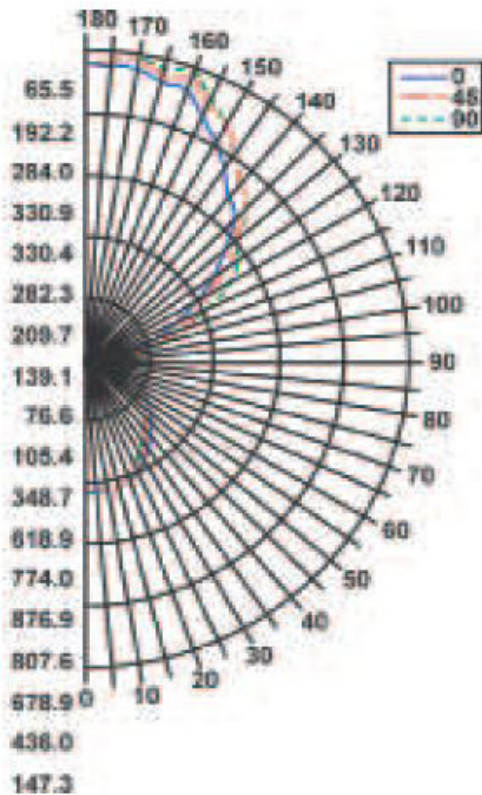

Zone	Lumens	% Lamp	% Fixt.
0-30	542	6.1	8.1
0-40	873	9.09	13.0
0-60	1485	16.8	22.2
0-90	1911	21.6	28.5
90-120	1073	12.1	16.0
90-130	1847	20.9	27.6
90-150	3531	39.9	52.7
90-180	4794	54.2	71.5
0-180	6704	75.8	100.0

White Channel and Perforated Basked with Inlay.  
Three 32W T8 Lamps (F32T8/835/RS)

#### DIMENSIONS

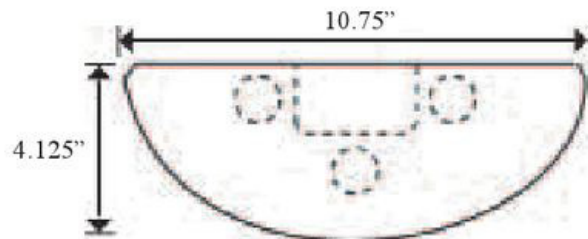

Dimensions and specifications subject to change without notice.