

### APPLICATIONS

An attractive center basket 2x2 direct/indirect fixture kit, the RDIDB provides soft, balanced illumination for a contemporary appearance and comfortable, low glare light. The housing and LED lamp modules are fully recessed above the ceiling plane, minimizing lamp exposure. Suitable for recessed commercial and institutional applications such as offices, hospitals, schools, etc.

### FEATURES & BENEFITS

- ◆ Reflectors and ends feature specially formulated proprietary matte white paint to enhance efficiency.
- ◆ Linear arrayed LEDs provide soft, effective illumination

\*\*Also suitable for T5 or T5HO linear lamps. (consult factory)



### SPECIFICATIONS



Die formed heavy gauge cold rolled steel. Clear acrylic or clear w/overlay "Double Bubble" lens or high transmission extruded acrylic baskets. Low gloss, high reflectivity powder coat finish. Standard troffer mounting for T-bar ceilings, with earthquake feature. LED light engine includes 50 chip board and matched driver from LG Innotek. The acrylic lens wraps around the LED modules or lamps to provide the ideal combination of efficiency and aesthetics. The curved reflectors produce a combination of direct and indirect light, fully illuminating the fixture housing.

### ORDERING DATA

EXAMPLE: RDIDB24LED32DMV30

RDIDB		LED		Driver		Color Temp		Options										
Series	Size	Gear	Wattages / Lumens		Driver		Color Temp		Options									
RDIDB	22 2x2	LED	<b>2x2</b>		DMV	120-277V	30	3000K	EM	10W Emergency Backup 1300 Fixture Lumens								
			24 2x4	24							24 Watts 2500 Lumens	0-10V Dimmable	35	3500K				
			28	28 Watts 2900 Lumens							*Consult for step dimming options		40	4000K				
			35	35 Watts 3500 Lumens								50	5000K					
			44	44 Watts 4200 Lumens										EM7	7W Emergency Backup 900 Fixture Lumens			
			<b>2x4</b>									EM5	5W Emergency Backup 650 Fixture Lumens					
			32	32 Watts 3650 Lumens							WP			6' 3 wire flexible conduit				
			48	48 Watts 5470 Lumens											WP5	6' 5 wire flexible conduit (For EM)		
			52	52 Watts 5944 Lumens													WPFID	6' 5 wire flexible conduit (For FIDMV)
			57	57 Watts 6200 Lumens														

### DIMENSIONS

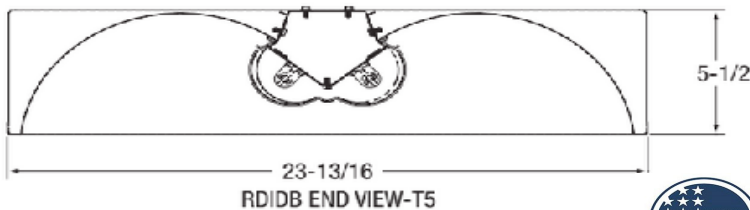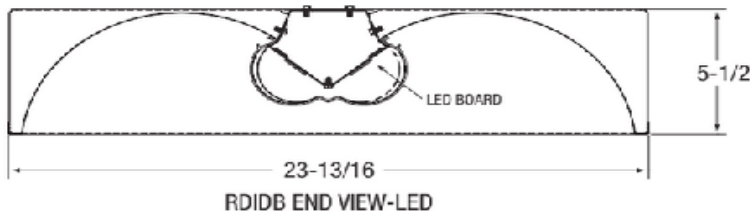

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE