

### APPLICATIONS

The SKY Series offers the look and feel of a fluorescent luminaire - subtle soft direct elements, interest and depth across the ceiling plane - with a contemporary look that blends with today's commercial spaces. Suitable for offices, hospitals, schools, etc. Suitable for use in standard 15/16" inverted T-bar grid ceilings.

### FEATURES & BENEFITS

- ◆ High performance optical engine delivers main beam focus through the integrated acrylic lens
- ◆ Linear ribbed acrylic lens with Lumieo® overlay manages the balance of efficiency and aesthetics
- ◆ Linear arrayed LED modules provide diffused and effective illumination
- ◆ cETL<sub>US</sub> listed for damp locations



### SPECIFICATIONS

Low profile troffer body housing with white enamel finish. High reflectance optical engine. Linear ribbed acrylic lens with Lumieo®. Recessed troffer fixture body assembly in 2'x2' and 2'x4' size.

### ORDERING DATA



**EXAMPLE: SKY22LED20DMV30**

SKY		LED		DMV			
Series	Size	Gear	Wattage / Lumens		Driver	Color Temp	Options
SKY LED 2x2 - 2x4 Troffer	22 2x2 24 2x4	LED	<b>2x2</b>		DMV 120-277VAC 0-10V Dimmable	30 3000K 35 3500K 40 4000K 50 5000K	EM 10W 1300 Lumen Battery backup EM5 5W 650 Lumen Battery backup EM7 7W 900 Lumen Battery backup
			<b>2x4</b>				
			20	20 Watts 2455 Lumens			
			24	24 Watts 3035 Lumens			
			28	28 Watts 3510 Lumens			
			32	32 Watts 3935 Lumens			
			36	36 Watts 4190 Lumens			
			45	45 Watts 4990 Lumens			
			28	28 Watts 3600 Lumens			
			31	31 Watts 4055 Lumens			
			35	35 Watts 4560 Lumens			
			40	40 Watts 5200 Lumens			
			45	45 Watts 5825 Lumens			
			50	50 Watts 6455 Lumens			
			55	55 Watts 6975 Lumens			
			60	60 Watts 7355 Lumens			


Dimensions and specifications subject to change without notice.



### DIMENSIONS

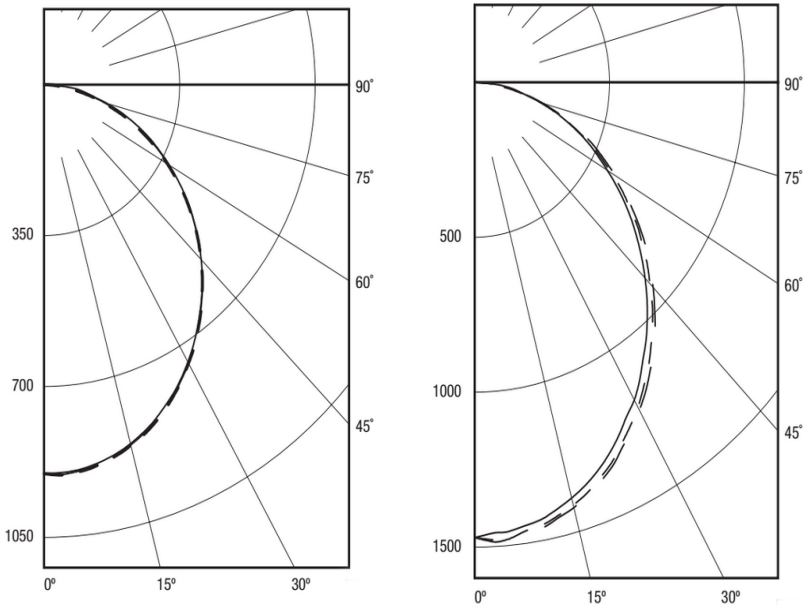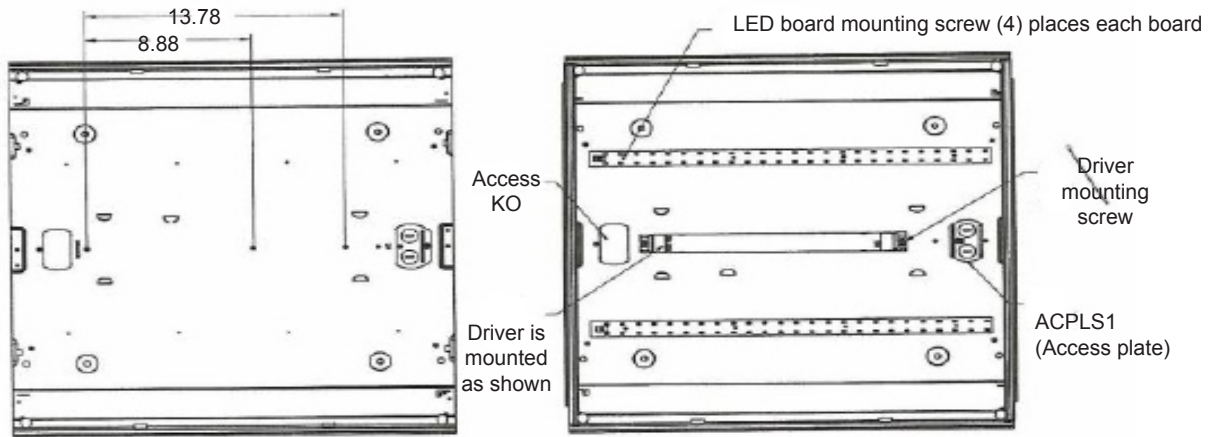

Cross Section

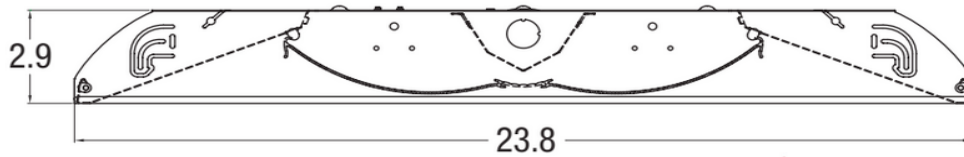

Dimensions and specifications subject to change without notice. ©

