

APPLICATIONS

Premium surface mounted deep cell parabolic fixture designed for maximum efficiency and visual comfort. Ideal for commercial and industrial buildings requiring general illumination with surface configurations and low glare.

FEATURES & BENEFITS

- ◆ **P³ Technology - Post Powder Paint**
- ◆ > 90% reflectivity
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ Clean appearance with no exposed fasteners
- ◆ Low iridescent louver is maintenance free semi-specular anodized aluminum
- ◆ Louver hinges and latches from either side
- ◆ Black reveal provides gap free floating louver appearance
- ◆ Various cell configurations available
- ◆ Pre-lamp available
- ◆ Every fixture individually tested
- ◆ UL listed for damp location



SPECIFICATIONS

Housing is die-formed from cold rolled steel. A framed parabolic troffer offering improved photometrics over our standard welded surface parabolic fixture. Finish is high reflectance **P3 - Post Powder Paint**. Precision formed anodized semi-specular aluminum louver. Standard nominal 3" deep cell louvers are manufactured using interlocked construction and mitred corners. Louver hinges from either side. Latches use a positive locking cam action and come with matching finish. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. A protective film is provided to protect the and fixture from construction dust. Listed by and bears UL label.

ORDERING DATA

EXAMPLE: SPR 22 9 LED 24 DMV 30

SPR													
Series	Size		Cell #		Gear	Wattage		Driver Type		Color Temp	Options		
SPR	14	1x4	8	8 cell (STD 1x4)	LED	24	24W 2725 Lumens	DMV	Dimmable driver	30	3000K	EM	Emergency battery pack
Premium	22	2x2	9	9 cell (STD 2x2)		30	30W 3300 Lumens	FIDMV	Factory Installed	35	3500K		10W ~ 1300 Lumens
Surface	24	2x4	12	12 cell (2x4)		32	32W 3600 Lumens		120-277VAC	40	4000K	EM5	Emergency battery pack
Parabolic			16	16 cell (2x2)		48	48W 5450 Lumens		Multivolt, 0-10V	50	5000K		5W ~ 650 Lumens
			18	18 cell (STD 2x4)		48	48W 5450 Lumens		Dimming				
			24	24 cell (2x4)		60	60W 6600 Lumens						
			32	32 cell (2x4)		85	85W 8675 Lumens						

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794



CAT#

JOB NAME


TYPE

DIMENSIONS


TOP VIEW

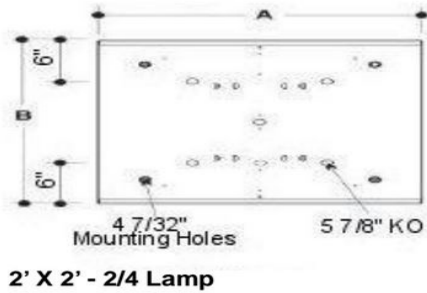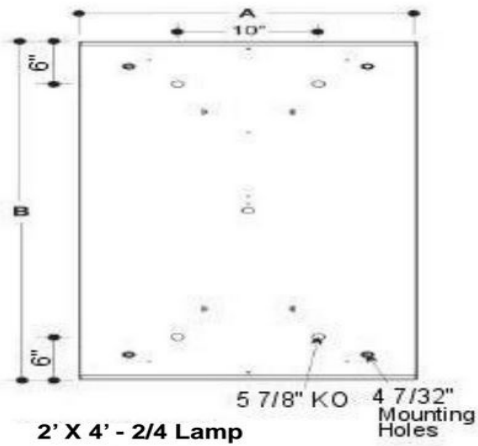

END VIEW

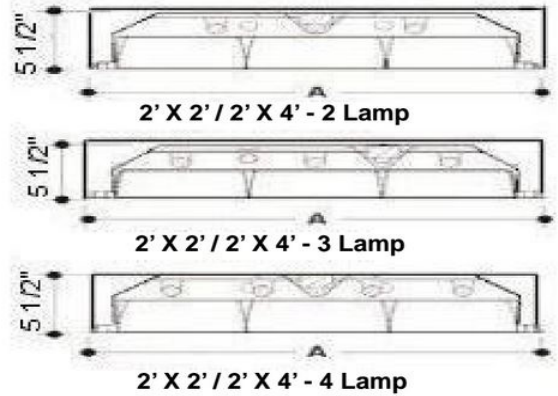

SIDE VIEW



MODEL CONFIGURATION	A	B
---------------------	---	---

2' x 2'

24"

24"

2' x 4'

24"

48"



Dimensions and specifications subject to change without notice.

