

APPLICATIONS

Low profile surface dual basket SRDISD is a specification grade, direct/indirect dual diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened "sky light" appearance to the modern office environment.

FEATURES & BENEFITS

- ◆ Direct/indirect mimics "sky light" appearance
- ◆ Matte white reflective surfaces for soft, uniform light distribution
- ◆ Over 80% efficiency when used with frosted and acrylic diffuser
- ◆ Surface dual frosted diffuser with acrylic overlay
- ◆ 0-10V dimming driver standard
- ◆ ETL Listed



SPECIFICATIONS

Housing is die-formed and embossed code 20 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Diffusers are perforated to maintain even brightness, and provided with an internal, acrylic overlay to obscure LED boards. Listed by and bears UL label.

ORDERING DATA

EXAMPLE: SRDISD24-LED32FRDMV40

SRDISD		LED		DMV						
Series	Size	Gear	Wattage & Lumens		Diffuser		Driver Type		Color Temperature	
SRDISD	22 2x2 24 2x4	LED	<u>2x2</u>		FR	Frosted	DMV	Dimming multivolt	30	3000K
			24	24 watts 2400 Lumens	RL	Ribbed Lens		120-277V	35	3500K
			28	28 watts 2700 Lumens	PF	Perforated Basket		0-10V	40	4000K
			<u>2x4</u>						50	5000K
			32	32 watts 3450 Lumens						
			48	48 watts 4800 Lumens						
			57	57 watts 5400 Lumens						

*Call factory for additional options




Dimensions and specifications subject to change without notice.




DIMENSIONS


1x4 View

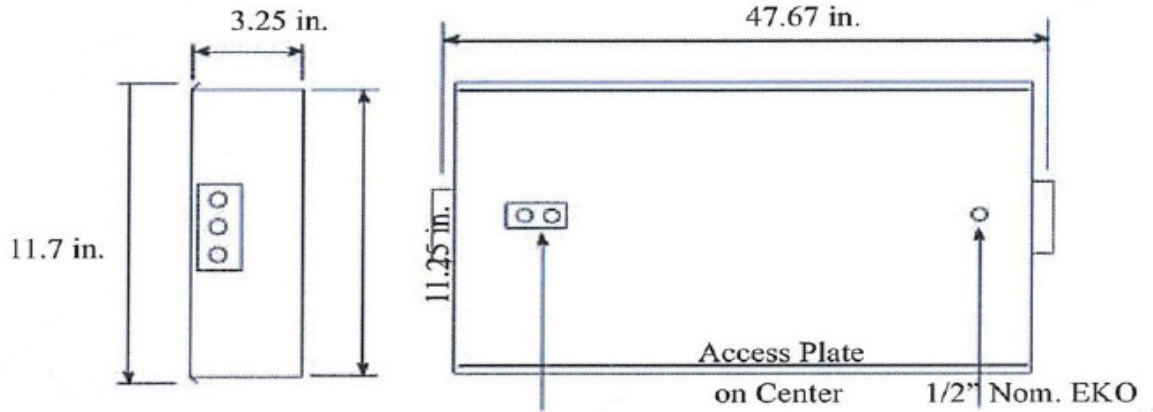

2x2 View

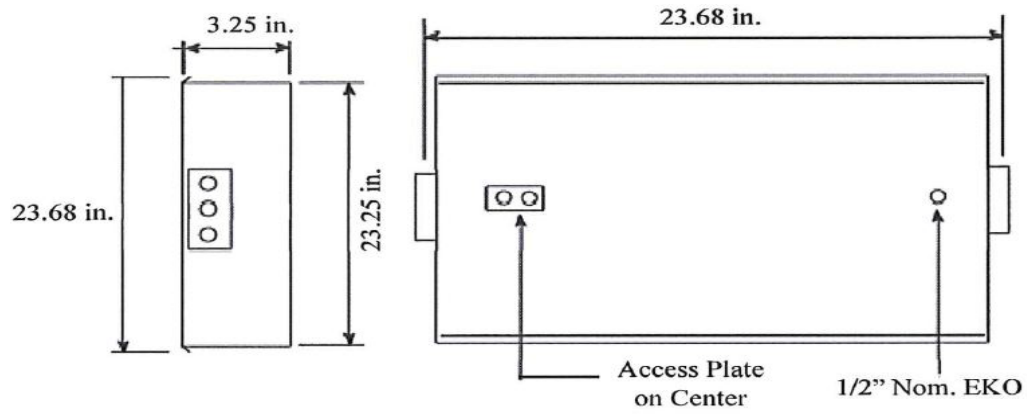

2x4 View

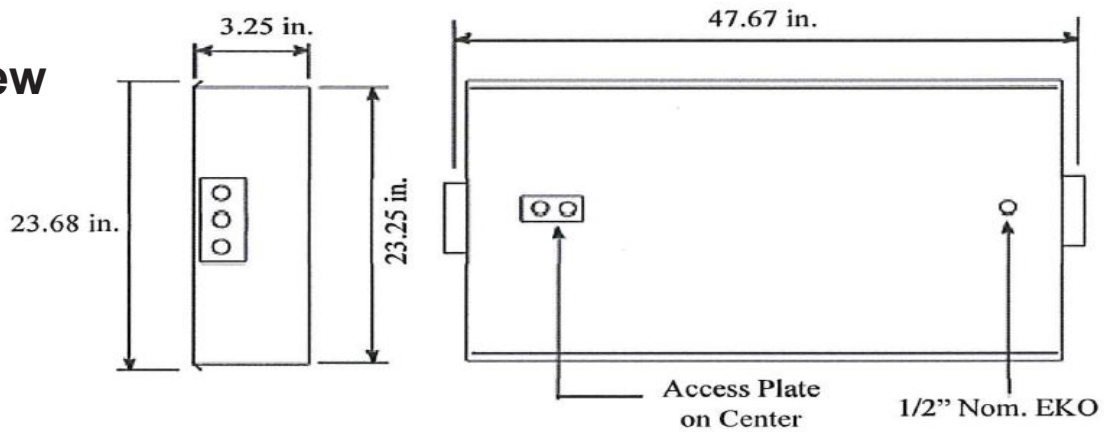

Dimensions and specifications subject to change without notice.

