

APPLICATIONS

Premium quality low profile surface troffer with an almost limitless range of applications. Ideal for all commercial and industrial buildings requiring general illumination with recessed configurations.

FEATURES & BENEFITS

- ◆ 0-10V Dimming Driver standard
- ◆ Corrosion and scratch resistant
- ◆ Smooth edges for easy handling
- ◆ Ends are secured by snap-in interlocking system
- ◆ Clear .100 acrylic prismatic lens is standard
- ◆ Exclusive "Light Lock" frame reduces light leaks
- ◆ Flush steel door with rotary action cam latches and hinges from either side
- ◆ Easy access plate for quick wiring
- ◆ Equipped with Integral Earthquake Clips
- ◆ **ETL** listed for damp location



SPECIFICATIONS

Housing is die-formed and embossed from cold rolled steel. Wiring access plate and knockouts are provided on back of housing allowing for flexible greenfield attachment. Driver cover snaps easily into place eliminating the need for tools when accessing the driver. Prismatic lens is held within a hinged steel frame door. The heavy gauge door frame hinges downward on either side and is held in the closed position by two positive cam latches. Knockouts are provided on ends for continuous wiring. Listed by and bears **ETL** label.

ORDERING DATA

EXAMPLE: SRG22-LED33DMV40

SRG		LED		Wattage		Driver Type*		Color Temp		Options
Series	Size	Gear								
SRG	14 1x4	LED							See Below	
LED Surface Troffer	22 2x2 24 2x4									
			Standard 1x4							
			22	22 Watts 2810 Lumens						
			30	30 Watts 3585 Lumens						
			35	35 Watts 4090 Lumens						
			40	40 Watts 4590 Lumens						
			48	48 Watts 5385 Lumens						
			57	57 Watts 6370 Lumens						
			Standard 2x2							
			20	20 Watts 2300 Lumens						
			24	24 Watts 2600 Lumens						
			28	28 Watts 3000 Lumens						
			35	35 Watts 3600 Lumens						
			45	45 Watts 4470 Lumens						
			Standard 2x4							
			32	32 Watts 3970 Lumens						
			35	35 Watts 4345 Lumens						
			45	45 Watts 5500 Lumens						
			48	48 Watts 5900 Lumens						
			57	57 Watts 6735 Lumens						
			62	62 Watts 7000 Lumens						
						DMV				
						Dimmable 120-277VAC 0-10V		35 3500K 40 4000K 50 5000K		
						SDMV				
						Step Dimming 120-277VAC 100%-40%				
						FIDMV				
						120-277VAC Input Factory Installed 0-10V Dimming				

Options

- Blank** A12 .100 thick lens
- 125** A12 .125 thick lens
- 156** A19 .156 thick lens
- CL** Clear .100 thick lens
- CL125** Clear .125 thick lens
- SW** Smooth White .100 thick lens
- S5** Specular Parabolic Louver (1/2"x1/2"x3/8")
- S7.5** Specular Parabolic Louver (3/4"x3/4"x3/8")
- S1.5** Specular Parabolic Louver (1 1/2"x1 1/2"x1")
- W5** White Parabolic Louver (1/2"x1/2"x3/8")
- DD** Drop Dish Lens
- A78** 78 Cell (2x4) or 36 Cell (2x2)
- NL** No Lens
- NFL** No Frame and Lens
- EM** Emergency battery pack 10W ~1300 Lumens
- EM7** Emergency battery pack 7W ~900 Lumens
- EM5** Emergency battery pack 5W ~650 Lumens

*Consult factory for Triac Dimming Options



Dimensions and specifications subject to change without notice.

◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794


CAT#

JOB NAME

TYPE

DIMENSIONS

TOP VIEWS

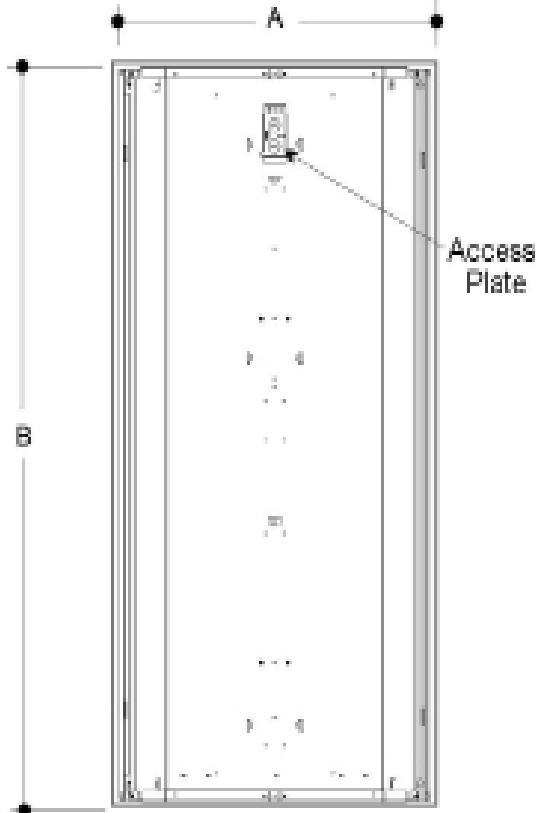

MODEL CONFIGURATION

A


2' x 2'
2' x 4'

23 3/4"
23 3/4"


23 3/4"
47 3/4"

SIDE VIEW

B

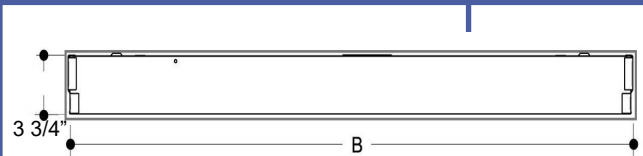

END VIEW

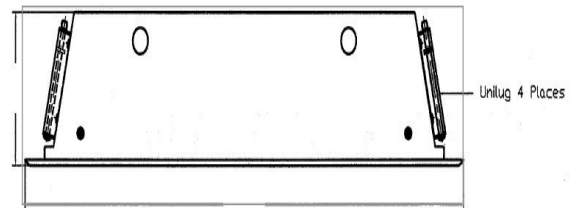

Dimensions and specifications subject to change without notice.

