

APPLICATIONS

Typical applications for this series include open office cubicles, offices, conference rooms, restrooms, stairwells, and hallways. The housing is post powder painted, die-formed, 20 gauge steel with aluminum end caps. The optional Smart Sense technology provides superior detection in hard surfaced areas, such as stairwells and hallways and features Bi-level lighting control. Smart Sense technology can yield energy savings upwards of 50% for fixtures that are normally on 24/7 all year long, while providing adequate illumination for safety and egress.

FEATURES & BENEFITS

- ◆ **Optional Ultrasonic Smart Sensor**
- ◆ Continuous row mounting
- ◆ Post painted powder coat finish
- ◆ White standard, custom colors available
- ◆ L70 > 60000 hrs
- ◆ Min 80 CRI
- ◆ 5 year warranty



STW with optional Smart Sense



ORDERING DATA



EXAMPLE: STWR24LED15DMV30SS-10

STW		R		LED		DMV		Color Temp		Optional Smart Sense	
Series	STW			Gear	Watts/Lumens	Driver*		30	3000K	SS-10	10%
LED Stairwell Bracket				LED	2 ft.	DMV 120-277VAC		35	3500K	SS-20	20%
		Lens			15 15 Watts 2050 Lumens	Multivolt		40	4000K	SS-30	30%
		R Round			24 24 Watts 3000 Lumens	0-10V Dimmable		50	5000K	SS-40	40%
					4 ft.	*Consult for Triac dimming				SS-50	50%
		Size			48 48 Watts 6000 Lumens		Finish			SS-60	60%
		24 24"			57 57 Watts 6900 Lumens		Blank White			SS-70	70%
		48 48"					BK Black			SS-80	80%
							SL Silver			SS-90	90%
							IN Iron				
							BZ Bronze				
							Options				
							EM 10 Watts, 1600 Lumens				
							Battery Backup				

Dimensions and specifications subject to change without notice.




DIMENSIONS

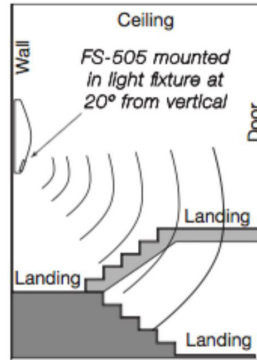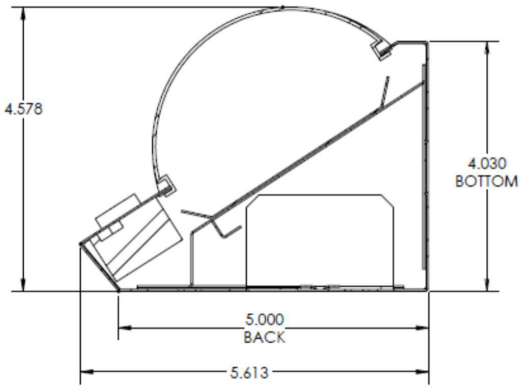

FS-505 Mounted in Stairwell

Ultrasonic technology for open area detection and line-of-sight obstructions.

2 ft Dimensions

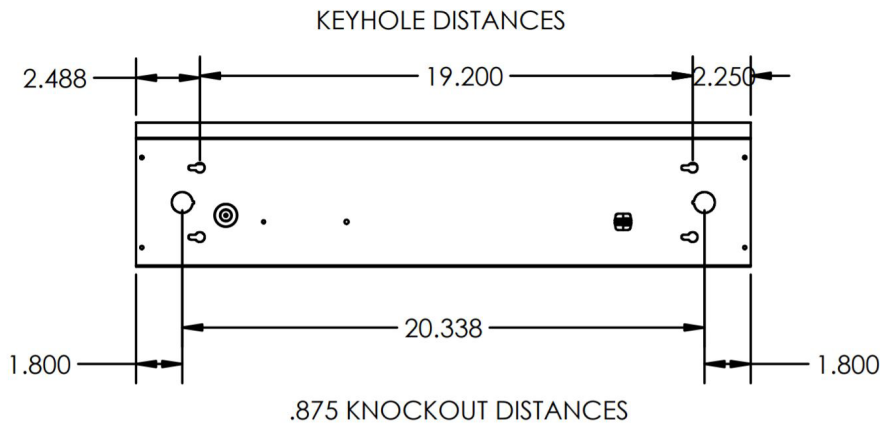

4 ft Dimensions



Dimensions and specifications subject to change without notice.



CAT#	
JOB NAME	TYPE