

APPLICATIONS

Introducing the Mobern VWN-LED Premium grade enclosed and gasketed vaportight fixture. This Energy-Saving High Performance LED Vaportight is ideal for both indoor and outdoor applications where dust and water resistance is required. Ideal for parking garages, cold storage, marinas, barns, canopies, car washes, poultry farms, agricultural applications and other areas susceptible to corrosive and wet conditions.

FEATURES & BENEFITS

- ◆ Designed for easy assembly
- ◆ Ease of Installation and Maintenance
- ◆ Visually familiar light sourcing
- ◆ Poured in place gasket seals the enclosures from most hostile environments
- ◆ Economical Mounting System can provide dramatic savings on installation labor, thus reducing costs
- ◆ Very tough diffusers resist breakage and reduce replacement and maintenance costs
- ◆ Available in 4' length only
- ◆ Frosted lens for reducing direct glare and image of the LED
- ◆ Optional durable stainless steel mounting hardware
- ◆ No need to drill through the housing for installation
- ◆ Optional stainless steel bail for chain/cable hung installations
- ◆ ETL listed for wet location
- ◆ Consult for other options



SPECIFICATIONS



High quality enclosed fiberglass fixture features a unique continuous poured gasket which completely fills channel for maximum seal integrity. Diffuser is held in place with POM retaining latches. Stainless steel latches are recommended for the following applications: agriculture, car washes, food processing and swimming pools. Hole is 7/8" diameter and is provided with a plastic plug on one end for conduit attachment. Offset mounting pads which keeps luminaire level and slightly off of mounting surface are formed within the housing. Standard diffuser is high impact acrylic with textured pattern designed for high efficiency while providing reduced glare. Listed by and bears ETL label.

ORDERING DATA

EXAMPLE: VWN4LED24DMVSC40

VWN		LED		Voltage		Lens		Color Temp		Options		
Series	Size	Gear	Wattage/Lumens									
VWN	4 4 ft	LED	24	24W	2800 Lumens	DMV	120-277V	RC	30	3000K	CS	Cord 18/3 6"
LED			35	35W	4100 Lumens		0-10V Dimmable	RF	35	3500K	OS	Occupancy Sensor
Vaportight			42	42W	4700 Lumens			SC	40	4000K	OSW	Occupancy Sensor - Wet Location
			48	48W	5600 Lumens			SF	50	5000K		

*Consult for other wattages

Lumens are subject to a tolerance ±10%
Wattage is approximate and subject to a tolerance of ±5%

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆


8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE


DIMENSIONS

Side View

Housing Only




RC/RF Lens



End View

RC-Ribbon, Clear
RF-Ribbon, Frosted
SC-Smooth, Clear*
SF-Smooth, Frosted*
*Increase depth by 0.25"

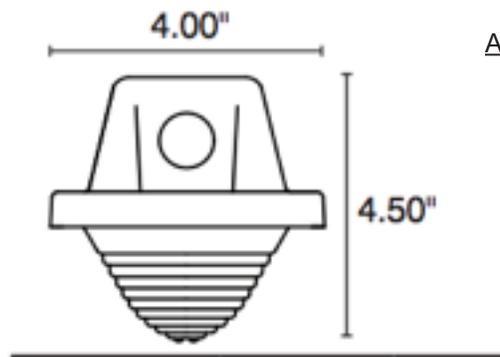

Accessories

VW-MB1L
-Mounting basket (1)
2 required

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#			
JOB NAME		TYPE	