


FEATURES & BENEFITS

- ◆ High quality die cast housing
- ◆ Durable chip and fade resistant powder coat finish
- ◆ Sealed borosilicate glass lens
- ◆ High specular forward throw reflector
- ◆ Gasket sealed driver enclosure
- ◆ 90° adjustability of beam angle with full cut off option
- ◆ High power Citizen COB LEDs (73W)
- ◆ Ultimate versatility allows wall, post or bollard and horizontal floodlight installations
- ◆ Includes 120V photo cell
- ◆ UL/ cUL listed

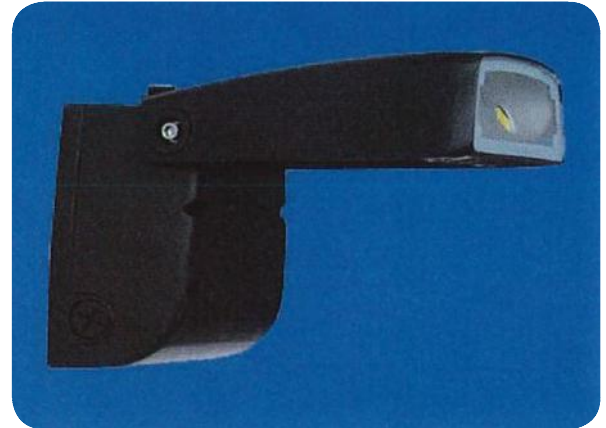


ORDERING DATA

EXAMPLE: WPL 29W 1164L 50K BZ


Series	Wattage	Lumens	Color Temperature	Fixture Color
WPL	14W 14 Wattage	1164L 1164 Lumens	50K 5000K	BZ Bronze
WPL	20W 20 Wattage	1848L 1848 Lumens	50K 5000K	BZ Bronze
WPL	29W 29 Wattage	2346L 2346 Lumens	50K 5000K	BZ Bronze

90 Degree Beam Angle

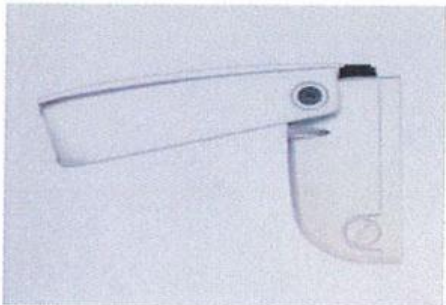

• Size: 6.22W x 6.25H x 8.54D

Full Cut Off Beam Angle

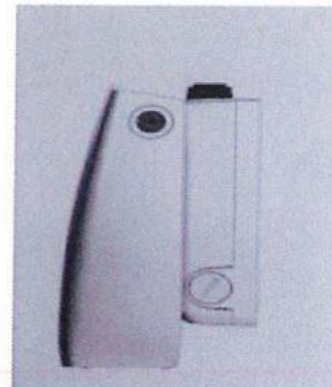

• Size: 6.22W x 7.22H x 3.81D

Dimensions and specifications subject to change without notice.

CAT#			
JOB NAME		TYPE	