


SPECIFICATIONS





- 120-277V INPUT VOLTAGE, 50/60Hz
- 8 CREE LED ARRAY (18W)
- 18W 1824 LUMENS
- 82 LPW***
- 4000 KELVIN
- 74 CRI (TYP)
- CONSTANT CURRENT AT 700 mA
- DRIVER UL CLASS 2, POWER FACTOR > .90
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +40°C (105°F)
- ESTIMATED 50,000 HRS L₇₀*
- THERMALLY PROTECTED LED ARRAY
- POLYCARBONATE BASE AND DIFFUSER
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- WALL OR CEILING MOUNT
- UL/CUL LISTED FOR WET LOCATION



WRC

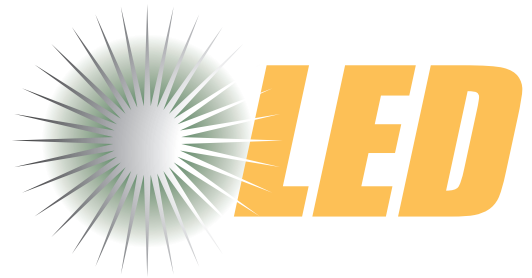

WSC



| | LED | | | 18 | MV | 40 | |
|---|------|--------------------------------------|--|---------------|----------------------|------------|--|
| Series | Gear | Fixture | Lens | Wattage | Voltage | Kelvin | Options |
| WRC = 10" Round WSC = 10" Square | LED | B = Black W = White | WH = White FP = Frosted Prismatic | 18 = 18 Watts | MV = 120-277V | 40 = 4000K | O = Occupancy Sensor P = Photocell Photocells are only available for 120V applications |

| |
|------------------------------|
| CANOPY LED REPLACEMENT PARTS |
| 18LR8R= 8 CREE LED ARRAY |
| IG1800-DMV-1 = LED DRIVER |

* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST
 ** ESTIMATED FROM LED SOURCE

Specifications subject to change without notice. Printed in U.S.A. © 2013 Mobern Lighting Company

