

**JOB NAME:**
**CAT#:**
**TYPE:**

## APPLICATIONS

The linear 4x5 LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x5 Series fixtures can be installed individually or in group patterns.

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity.

## FEATURES & BENEFITS

- Fixtures can be surface mounted, pendant recessed or cable
- Accepts various lenses or louvers
- 8' units have a steel mullion to join two individual diffusers
- Optional welded light-leak flanges are available on ends
- Every fixture is individually tested
- Min CRI 82
- ETL listed for damp location

## DIMENSIONS

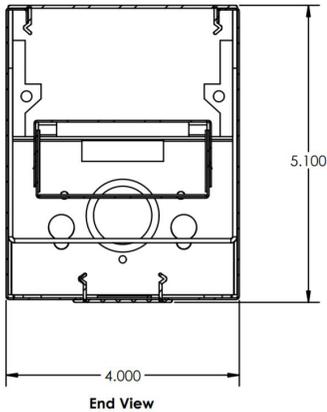
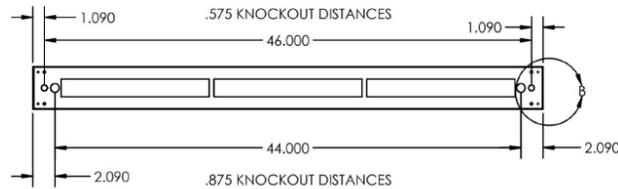

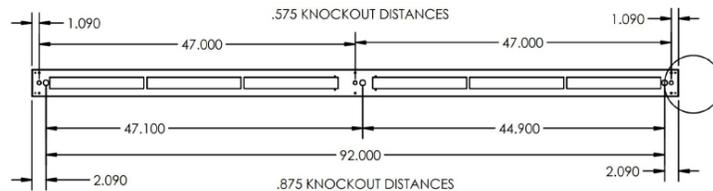


**FROSTED LENS**  
 (acrylic snap-in lens)  
 Frosted: 85% efficient  
**SF** Frosted Lens

Uplight and Downlight View



Continuous Run End View


**48L Drawing**

**96L Drawing**


Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: L45 W 48 LED 1U2D 36 DMV WH MW 30 H4W EM P11

L45		LED						
1. SERIES	2. MOUNTING	3. SIZE	4. GEAR	5. DISTRIBUTION	6. WATTAGE/LUMENS	7. DRIVER		
<b>L45</b> Direct Indirect	<b>W</b> Wall Mount	<b>48</b> 48"	<b>LED</b>	<b>1U2D</b> Up and Downlight	<b>4 ft.</b>		<b>DMV</b> 120-277V Multivolt 0-10V Dimmable	
	<b>P</b> Pendant Mount	<b>96</b> 96"			<b>36</b> 36W 1200U-2400D	<b>54</b> 54W 1800U-3600D		<b>72</b> 72W 2400U-4800D
					<b>8 ft.</b>			
					<b>72</b> 72W 2400U-4800D			
					<b>108</b> 108W 3600U-7200D			
8. FINISH		9. LENS OPTIONS		10. COLOR TEMP	11. REFLECTOR(O) <sup>1</sup>		12. CABLE KIT(O) <sup>1</sup>	
<b>WH</b> Matte White	<b>MW*</b> Matte White .100 thick regressed lens (std.)	<b>30</b> 3000K	<b>Blank</b> Standard	<b>H4W</b> HC301 Cable kit with 4 cable + power feed cable incl. with white canopy				
<b>SL</b> Silver	<b>S.5</b> Specular Parabolic Louver (1/2"x 1/2" x 3/8")	<b>35</b> 3500K	<b>WW</b> Wall Wash	<b>H4W5</b> HC301 Cable kit with 4' cable + power feed 0-10V dimming cable included with white canopy (5 wire)				
<b>BK</b> Black	<b>SF</b> Snap-in Frosted Lens	<b>40</b> 4000K		<b>H4W6</b> HC301 Cable kit with 4' cable + power feed 0-10V dimming and EM cable incl. w/ white canopy (6 wire) (check local codes)				
<b>BZ</b> Bronze	<b>LV</b> Baffled Louver	<b>50</b> 5000K		<b>H12W</b> HC302 Cable kit with 12' cable + power feed cable incl. with white canopy				
<b>IN</b> Iron				<b>H12W5</b> HC302 Cable kit with 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire)				
* MW lens on the 8' fixture requires a center support bracket to hold it in place								
13. EM(O) <sup>1</sup>		14. PLUG IN(O) <sup>1</sup>		15. CONFIGURATION				
<b>EM</b> Emergency Battery Pack 10W ~ 1700 lumens	<b>P11</b> 3 wire harness, including white, black and green	<b>BLANK</b> Individual						
<b>EM7</b> Emergency Battery Pack 7W ~ 1300 Lumens	<b>P12</b> 4 wire harness, including white, black, green and blue for emergency backup	<b>-B</b> Beginner Run						
<b>EM5</b> Emergency Battery Pack 5W ~ 850 Lumens	<b>P13D</b> 5 wire harness, including white, black, green, violet and gray	<b>-E</b> Ender Run						
		<b>-J</b> Joiner						

**NOTES:**

<sup>1</sup>O is optional  
 Custom louvers available in any cell configuration.  
 Consult factory for additional information.  
 \* 4 ft. available but not available in recessed

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

