



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

Mobern introduces LED low profile rectilinear lighting that can be pendant, surface, or wall mounted individually. Ideal for general lighting applications in both commercial and residential applications for circulation spaces, high impact areas, kitchen islands and home offices. The versatility and clean styling makes this an ideal choice in many applications.




### FEATURES & BENEFITS

- Available in surface, pendant, or wall mount
- Min CRI 80
- L70 ≥ 50,000 hrs.
- Pendant mount with 4' adjustable cable and power feed (2 for 4' unit or 8' unit, included)  
Consult factory for longer cables.
- 5 year warranty


### DIMENSIONS

#### Surface Mount


BACK VIEW

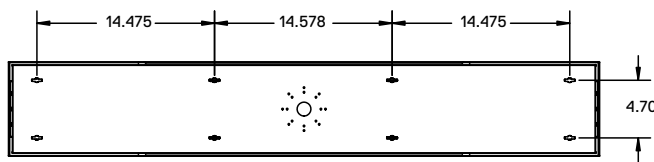

END VIEW

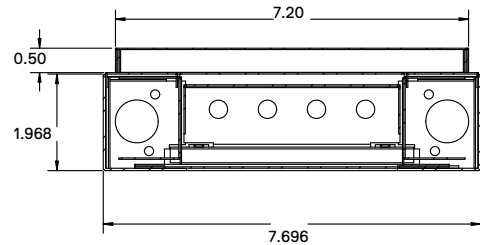

SIDE VIEW

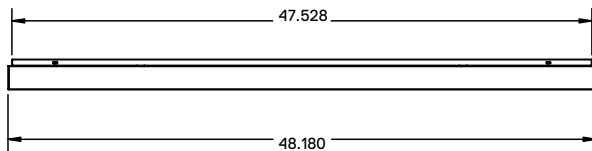



JOB NAME:



CAT#:

TYPE:


**DIMENSIONS**

**Pendant Mount**



BACK VIEW

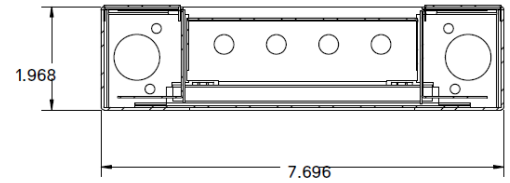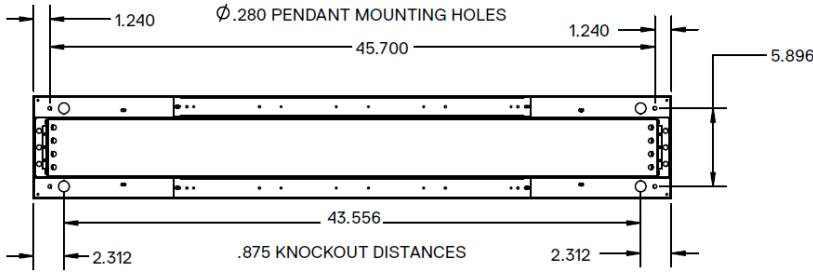


TOP

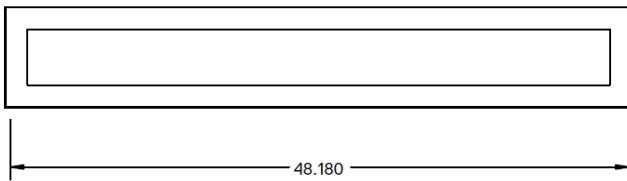

**Wall Mount**

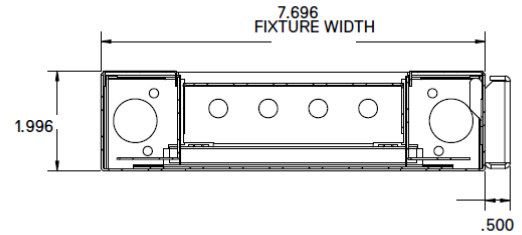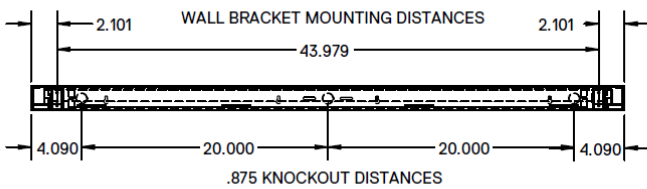

BRACKET DEPTH, SCREW TO  
WOODEN STUD, DRYWALL  
AROUND THE BRACKET

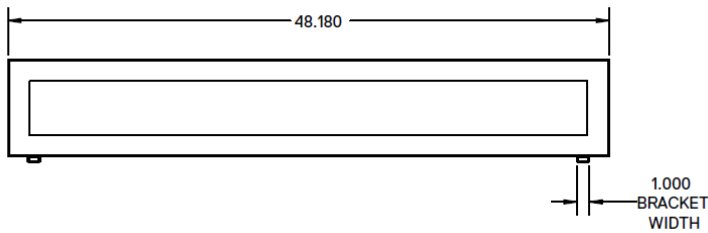



JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: LL P 48 LED 24 DMV WH MW 8 30 EM

**LL**

1. SERIES	2. MOUNTING	3. SIZE	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER
LL	<b>P</b> Low Profile Pendant <b>S</b> Low Profile Surface Mount <b>W</b> Low Profile Wall Mount	<b>48</b> 48" <b>96</b> 96"	<b>LED</b> <b>(blank)</b> Downlight only <b>1U2D</b> 1/3 uplight, 2/3 downlight <b>2U1D</b> 2/3 uplight, 1/3 downlight	<b>48"</b> <b>24</b> 24 Watts, 2400 lumens <b>36</b> 36 Watts, 3600 lumens <b>48</b> 8 Watts, 4800 lumens <b>54</b> 54 Watts, 5400 lumens  <b>96"</b> <b>72</b> 72 Watts, 7200 lumens <b>96</b> 96 Watts, 9600 lumens <b>108</b> 108 Watts, 10800 lumens	<b>DMV</b> 0-10V Dimming, 120-277V Multivolt  <b>D1MV</b> 0-10V Dimming, 120-277V Multivolt (dim to 1%)

7. FINISH	8. LENS	9. COLOR TEMP	10. EMERGENCY (O)*	11. CABLE KIT
<b>WH</b> White <b>SL</b> Silver <b>RD</b> Red <b>IN</b> Iron <b>BK</b> Black	<b>MW</b> White Lens <b>FR</b> Frosted Lens	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>EM</b> 14w 1400 lumen only  *(O) is optional	<b>(Blank)</b> HC401 4ft kit w/ 3 wire white cord & cable <b>H12W</b> HC402 12ft cable kit w/ 3 wire white cord & cable <b>H4W5</b> HC401 4ft cable kit w/ 5 wire white cord & cable <b>H12W5</b> HC402 12ft cable kit w/ 5 wire white cord & cable

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

