



JOB NAME:


CAT#:

TYPE:

APPLICATIONS

The FHBX series is offered with lens that cut glare and is dressed for applications requiring aesthetic appeal. Available with premium full specular mirrored reflectors for high efficiency lighting, white reflectors for wider distribution or standard without reflector for good economical performance. Mounting options include chain, stem or pendant cable. Custom paint finishes available. Ideal for retail applications.

Housing is 22 gauge prepainted steel. Air vents surround the driver and boards in the back of the fixture to maximize performance, reliability and life. High reflective mirror or enhanced white reflectors are computer designed to maximize photometric performance and put the light where you need it. Reflector snaps into fixture with no tools and is easily removable for driver maintenance. Access plate in the back makes wiring fast and hassle-free. Back of fixture is designed with built-in mounting holes for tong hanger, and cable kit. Integral Occupancy Sensor is optional and is ideal for wire guard applications. This fixture is not designed for surface mounting on ceiling or wall.

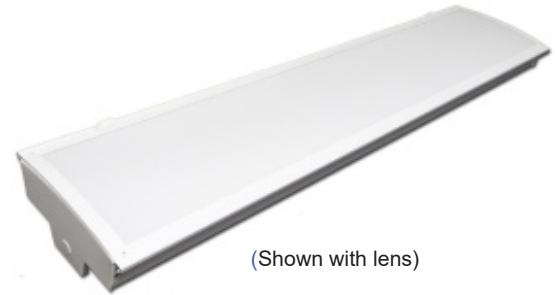

(Shown with lens)


FEATURES & BENEFITS

- 0-10V Dimming
- Designed for pendant, stem or chain hanging
- Mounting holes are provided for simple, fast installation
- Every fixture is individually tested
- 91% Reflectivity
- $cETL_{US}$ listed for damp location
- Min CRI 82

MOUNTING

Designed for pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation. See Buyers Guide for list of all mounting options available and sold separately.

DIMENSIONS

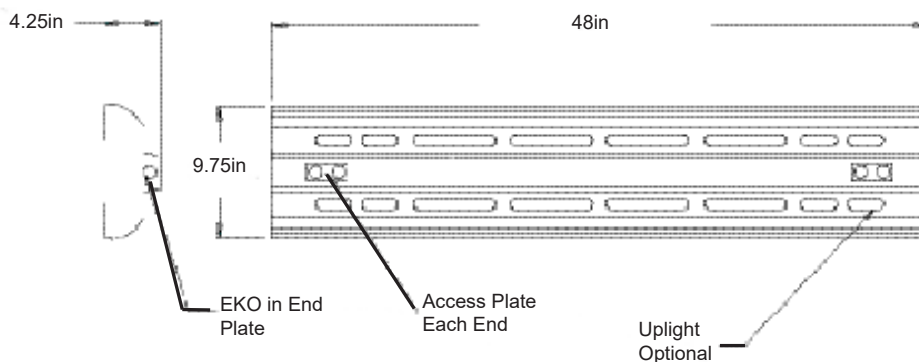

SIZE W x L x H in inches

4 ft. - 11.25W x 48L x 4.25H

8 ft. - 11.25W x 96L x 4.25H

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: FHBX 48 LED 32 DMV 30 EM CS

FHBX		LED										
1. SERIES		2. SIZE		3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		7. COLOR TEMP	
FHBX		48	48"	LED	<u>4 ft</u>		DMV	120-277V Multivolt 0-10V Dimmable	(Blank)	No lens	30	3000K
		96	96"		32	32 Watts 3450 lumens					FR	Frosted
					48	48 Watts 5640 lumens	SDMV	Step dimming Multivolt			40	4000K
					57	57 Watts 6400 lumens	D120	Triac Dimming 120VAC			50	5000K
					72	72 Watts 8200 lumens						
					<u>8 ft</u>							
					97	97 Watts 11300 lumens						
		114	114 Watts 12800 lumens									

8. EM(O)¹	9. CORD(O)¹
EM14 14W Emergency battery backup	CS 6 ft. 3 wire
	CS8 8 ft. cord, no plug
	CS12 12 ft. cord
	WP 6 ft. 3 wire, whip
	WP10 6 ft. 3 wire, whip

Size	Wattage	Initial Lumens (lm)	Efficacy (lm/W)	Kelvin Temperature	CRI
48"	32	3450	108	3000k 3500k 4000k 5000k	82+
48"	48	5650	118	3000k 3500k 4000k 5000k	82+
48"	57	6400	112	3000k 3500k 4000k 5000k	82+
96"	97	11300	116	3000k 3500k 4000k 5000k	82+
96"	114	12800	112	3000k 3500k 4000k 5000k	82+

NOTES:

¹ O is optional

Dimensions and specifications subject to change without notice.