

DLV6 LED Louvered 6" Decorative Linear

JOB NAME:

CAT#:

TYPE:

APPLICATIONS

A direct/indirect fixture that makes a bold statement by complementing design elements such as stone, metal, brick, and glass. The industrial look provides a modern aesthetic. It is available standard in white finish, and mounts with a cable kit. The louver is matte silver anodized parabolic.


FEATURES & BENEFITS

- Available standard in white finish or powder coated black
- Mounts with cable kit
- cETL_{us} listed
- 5 year warranty


DIMENSIONS

48.0"L x 8.0"W x 5.25"H 96.0"L X 8.0"W X 5.25"H



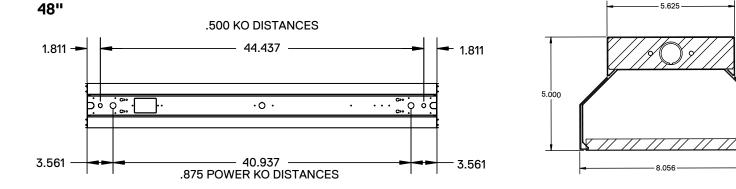

96"

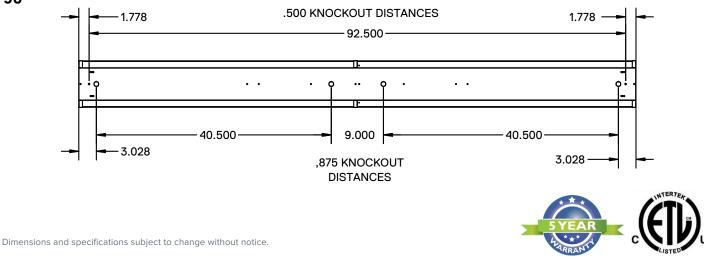

© COPYRIGHT 2008-21 MOBERN LIGHTING COMPANY



DLV6 LED Louvered 6" Decorative Linear

JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: DLV6 48 LED 48 DMV WH 40 H4W5

| DLV6 | | LED | | | | | | | | |
|-----------|--|---------|-------------------|------------------|------------------------------------|---|-----------|------------------|---------------|-------|
| 1. SERIES | 2. LENGTH | 3. GEAR | 4. WATTAGE/LUMENS | | 5. DRIVER | | 6. FINISH | | 7. COLOR TEMP | |
| DLV6 | 48 48" long96" long | LED | | 48 inch | 48W 4000 Lumens 57W 4800 Lumens | 120-277V Multivolt 0-10V Dimmable Step dimming Multivolt | WН | White | 30 | 3000K |
| | | | 48 | 48W 4000 Lumens | | | SI | Silver | 35 | 3500K |
| | | | 57 | 57W 4800 Lumens | | | BK BZ | Black | 40 | 4000K |
| | | | 72 | 72W 6000 Lumens | | | | Bronze 50 | 50 | 5000K |
| | | | | <u>96 inch</u> | | | GV | Galvanized Steel | | |
| | | | 48 | 48W 4800 Lumens | LUT | Lutron Driver ¹ | | | | |
| | | | 96 | 96W 8000 Lumens | | | | | | |
| | | | 114 | 114W 9600 Lumens | | | | | | |

144 W 12000 Lumens

| 8. EM(O) ² | | 9. HANGING KIT(O) ² | | | | | |
|-----------------------|---|--------------------------------|--|--|--|--|--|
| EM | Emergency Battery Pack 10W | H4W | Cable kit with 4 cable + power feed cable incl. w/ white canopy | | | | |
| EM5 | ~ 1700 lumens Emergency Battery Pack 5W | H4W5 | Cable kit with 4' cable + power feed 0-10V dimming cable included w/ white canopy (5 wire) | | | | |
| | ~ 850 Lumens | H12W | Cable kit w/ 12' cable + power feed cable incl.w/ white canopy | | | | |
| | | H12W5 | Cable kit w/ 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire) | | | | |
| | | 2SCS24WH | Two stem kits with 24" stem, canopy, and mounting hardware for a 4' fixture | | | | |

Notes: ¹See Lutron Chart for Driver & Controls Options ²O is Optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



800-444-WATT (9288) WWW.MOBERN.COM 2055 LUNA RD., STE.142 CARROLLTON, TX 75006 © COPYRIGHT 2008-21 MOBERN LIGHTING COMPANY REVISED 06/16/2022

PAGE 2/2