



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Premium grade LED strip fixture. For use in indoor applications such as factories, warehouses, workshops, utility areas, coves and public buildings where industrial grade, ultimate energy savings is required.


Housing is die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Single wireway cover on non-tandem units. Knockouts are provided for flexible conduit attachment. Knockouts are provided for stem mounting. Mounting holes are provided.



FEATURES & BENEFITS

- Snap-on components for easy assembly and maintenance
- Versatile end plate doubles as coupler for continuous row mounting
- Available in 24", 48", and 96" (2', 4', & 8' lengths). Consult for 3' and 6'
- Surface, stem or chain mountable
- Min CRI 82
- cETL_{us} Listed for damp location

DIMENSIONS

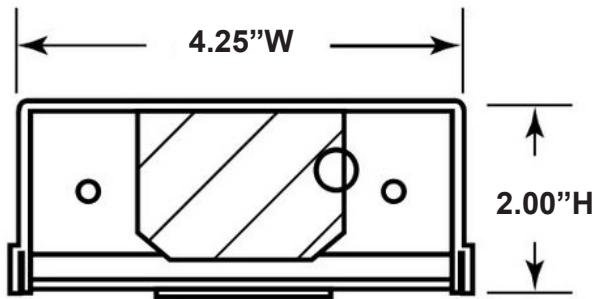



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 44 24 LED 18 DMV 30

44		LED							
1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		7. CRI
44 LED Premium Channel	24 24" long	LED	2 ft.		DMV 120-277V Multivolt 0-10V Dimmable	Blank No lens	FR Frosted	Blank 80 CRI	9 90 CRI
	48 48" long		15 15 Watts 2500 Lumens	20 20 Watts 3250 Lumens					
	96 96" long		25 25 Watts 4000 Lumens	33 33 Watts 5200 Lumens	LUT Lutron Driver				
			4 ft.		DHV 347-480VAC 0-10V Dimming				
			15 15 Watts 2500 Lumens	20 20 Watts 3400 Lumens	D347V 347VAC 0-10V Dimming				
			25 25 Watts 4250 Lumens	30 30 Watts 5200 Lumens	D120 Triac Dimming 120VAC				
			35 35 Watts 5900 Lumens	40 40 Watts 6650 Lumens	D277 Triac Dimming 277VAC				
			45 45 Watts 7400 Lumens	50 50 Watts 8150 Lumens					
			54 54 Watts 8550 Lumens	54 54 Watts 8550 Lumens					
			8 ft.						
			30 30 Watts 5000 Lumens	40 40 Watts 6800 Lumens					
			50 50 Watts 8450 Lumens	60 60 Watts 10350 Lumens					
			70 70 Watts 11700 Lumens	80 80 Watts 13300 Lumens					
			90 90 Watts 14800 Lumens	100 100 Watts 16300 Lumens					
			108 108 Watts 17100 Lumens						

7. COLOR TEMP ¹	8. EMERGENCY (O) ²	9. LENS READY (O) ²	10. SENSOR (O) ²	11. CORD & WHIP (O) ²
30 3000K	EM Emergency Battery Pack 10W ~1300 Lumens	LR Lens ready	OS Occupancy Sensor	CS Cord 18/3 6" WP 6' whip 3 wire
35 3500K				
40 4000K	EM5 Emergency Battery Pack 5W ~650 Lumens			
50 5000K				

ACCESSORIES

- A69 Wireguard per 4ft.
- A144-2 (2) V-hook & (2) 2ft. chains
- L1085 4 ft. lens
- L1085-V096 8ft. seamless lens
- M39-LED Ends to add lens; requires 2 per fixture

Notes:

¹Consult factory for 90CRI 50K availability
²(O) is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

