



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This premium grade LED industrial fixture is great for use in indoor applications such as factories, warehouses, workshops, garages and utility areas where concentrated light output is required.



The housing is die-formed from cold rolled steel. The finish is high reflectance baked white enamel. A versatile end plate doubles as coupler for continuous row mounting, and the reflector is one single piece. Knockouts are provided for flexible conduit attachment. cETL_{US} listed for damp location.



FEATURES & BENEFITS

- Single unit or continuous row mounting capability
- Versatile end plates doubles as coupler for precise continuous row mounting
- Available in 4 ft & 8 ft lengths (consult for other options)
- Surface, stem or chain mountable
- cETL_{US} listed for damp location
- CRI > 80, 90 CRI optional

DIMENSIONS

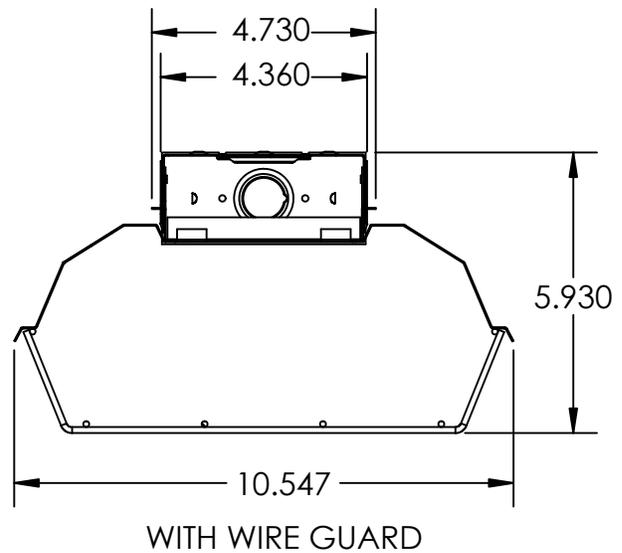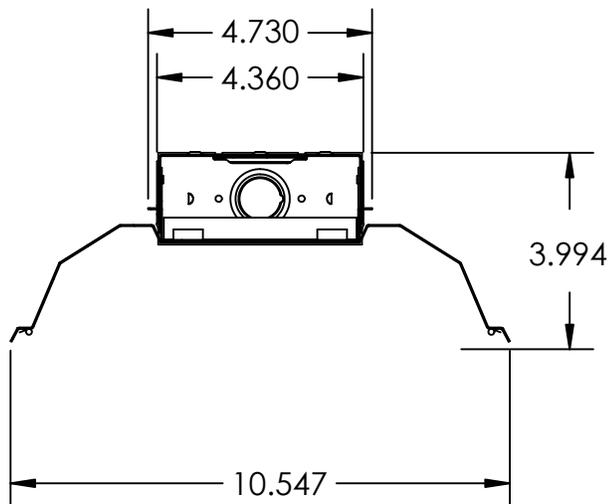



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 1 48 LED 30 DMV 35

1		LED				
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. COLOR TEMP	
1	48 48" long	LED	4 ft.		DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming TDMV Triac Dimming 120-277VAC D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC DIMV 0-10V Dimming (dim to 1%)	30 3000K
	96 96" long		32 32 Watts 5000 Lumens	35 3500K		
			48 48 Watts 6900 Lumens	40 4000K		
			57 57 Watts 7800 Lumens	50 5000K		
			8 ft.			
			57 57 Watts 7800 Lumens			
			70 70 Watts 9800 Lumens			
			97 97 Watts 12400 Lumens			
			114 114 Watts 14000 Lumens			

7. EMERGENCY (O) ¹	8. SENSOR (O) ¹	9. CORD (O) ¹	10. REFLECTOR
EM Emergency Battery Pack 10W ~ 1700 lumens	OS Occupancy Sensor	CS Cord 18/3 6'	W30 White steel reflector symmetric
EM5 Emergency Battery Pack 5W ~ 850 Lumens		*See chart below for whip & cord ordering options	W35 White steel reflector asymmetric
EM4F Emergency Battery Pack ~500 Lumens			

ACCESSORIES

A144-2 (2)V-hooks & (2) 2ft. chains

A71 Wireguard 4ft.²

Notes:

¹(O) is optional

²Order 2 for 8ft.

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.






JOB NAME:

CAT#:

TYPE:

DIMENSIONS

4 FT

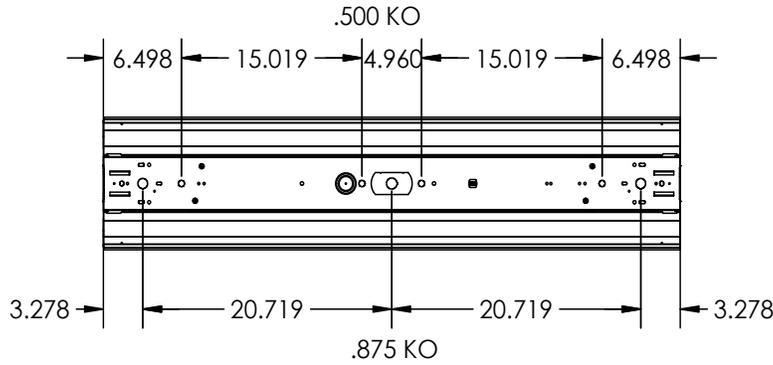

8FT

