



JOB NAME:


CAT#:

TYPE:

APPLICATIONS

Low profile surface dual basket SRDISD is a specification grade, direct/indirect dual diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened “sky light” appearance to the modern office environment.

Housing is die-formed and embossed code 20 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Diffusers are perforated to maintain even brightness, and provided with an internal, acrylic overlay to obscure LED boards. Listed by and bears UL label.

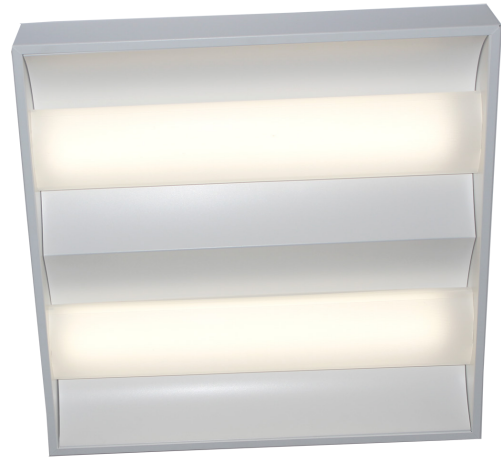


FEATURES & BENEFITS

- Direct/indirect mimics “sky light” appearance
- Matte white reflective surfaces for soft, uniform light distribution
Over 80% efficiency when used with frosted and acrylic diffuser
- Surface dual frosted diffuser with acrylic overlay
- 0-10V dimming driver standard
- ETL Listed

DIMENSIONS

1x4 View

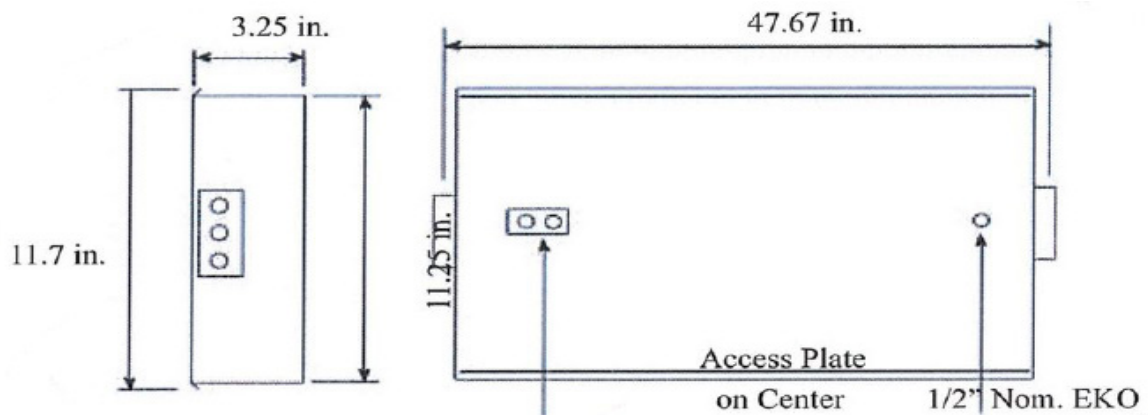




JOB NAME:

CAT#:


TYPE:

DIMENSIONS

2x2 View

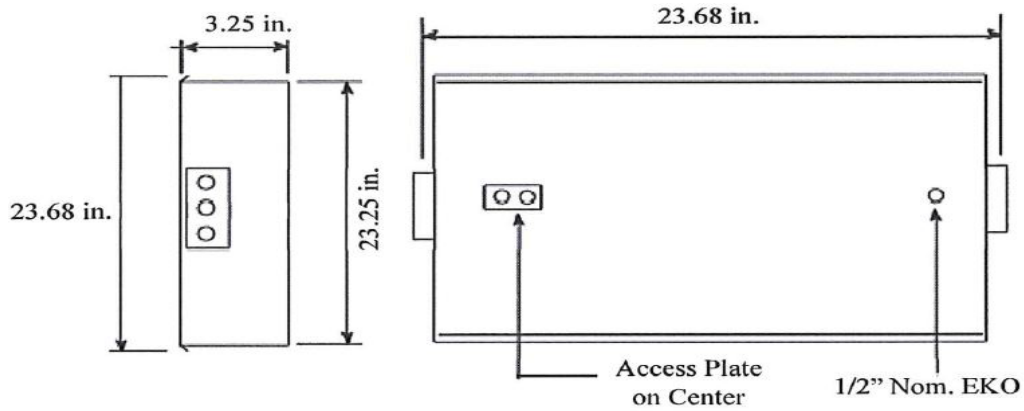

2x4 View

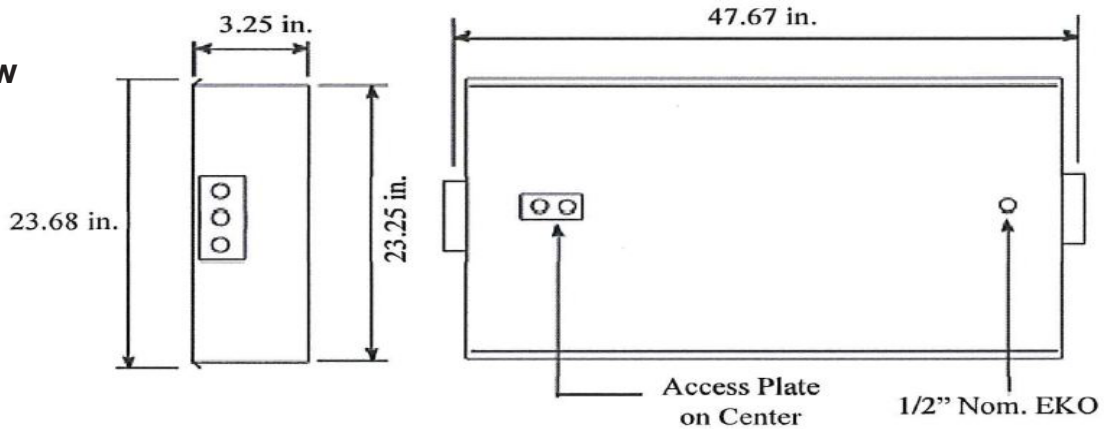



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: SRDISD 22 LED 28 FR DMV 30

SRDISD		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DIFFUSER	6. DRIVER	7. COLOR TEMP				
SRDISD	22 2X2 24 2X4	LED	<u>2x2</u> 28 28W 3200 Lumens 35 35W 4200 Lumens <u>2x4</u> 48 48W 6000 Lumens 57 57W 7100 Lumens	FR Frosted RL Ribbed Lens PF Perforated Basket	DMV Dimming multivolt 120-277V 0-10V	30 3000K 35 3500K 40 4000K 50 5000K				

*Call factory for additional options

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

