



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The LED Crown series provides general illumination in residential, institutional and commercial interiors. Ideal for use in kitchens, office, utility areas or closets. Crown molding frame available in oak or white finish. Bracket and single screw frame.

Specially formed plastic diffuser produces flawless light source with even illumination on all sides and no distracting dark spots. Invisible hanging clips permit removal of lens from either side.



FEATURES & BENEFITS


- Surface or pendant mounting
- Beautiful matte lens for even light distribution
- Highest quality long life LED
- Double the life expectancy of fluorescent technology
- cETL_{US} Listed

DIMENSIONS

W x L x H in inches

- 25.0W x 25.0L x 4.125Dp
- 11.5W x 48.875L x 4.125Dp
- 16.75W x 48.875L x 4.125Dp

Side

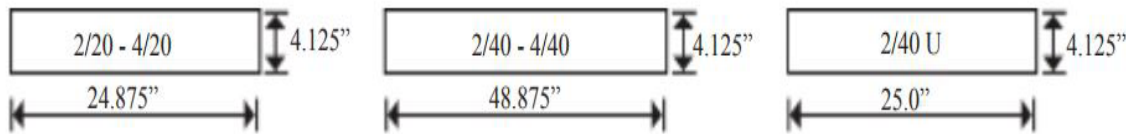

End





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: CWN 14 LED 32 DMV WH MW 30

CWN		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		6. DRIVER		7. FINISH		8. LENS
CWN	14 1X4 22 2X2 24 2X4	LED	<u>1x4</u> 32 32 Watts 3450 Lumens 48 48 Watts 4800 Lumens 57 57 Watts 5400 Lumens 67 67 Watts 6500 Lumens <u>2x2</u> 24 24 Watts 2400 Lumens 28 28 Watts 2700 Lumens 35 35 Watts 3200 Lumens <u>2x4</u> 32 32 Watts 3450 Lumens 48 48 Watts 4800 Lumens 57 57 Watts 5400 Lumens 67 67 Watts 6500 Lumens		DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming TDMV Triac Dimming 120-277VAC D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC		WH White GO Golden Oak ¹ BW Bleached White ¹		MW Matte White

9. COLOR TEMP

- 30** 3000K
- 35** 3500K
- 40** 4000K
- 50** 5000K

NOTES:

¹GO+BW Special Order

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

