

JOB NAME: CAT#: TYPE:

APPLICATIONS


Angled LED chrome fixtures provide softly angled light. Designed for bathrooms, kitchens, bulletin boards and above vanity mirrors.


Housing and ends are die-formed from cold rolled steel. Finish is post chrome plated on housing and end caps. One piece end caps fasten with singleacorn type nut. Extruded white translucent acrylic diffuser provides soft illumination. Diffuser is retained by a grooved formation running the length of the fixture and is held in place by the end caps. Mounting holes are provided. Mounts over electrical junction box. Knockouts are provided for fl exible conduit attachment. Optional decorative contour bands are available when units are row mounted.



- Post chrome plated steel housing is standard
- Smooth white opal acrylic wraparound diffuser
- · Single or continuous row mounting with optional contour band
- · Highest quality long life LED
- Min CRI 82
- Double the life expectancy of fluorescent technology
- Optional white enamel finish available
- Every fixture individually tested
- ETL Listed for damp locations

DIMENSIONS

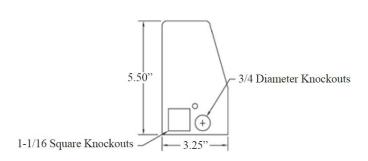

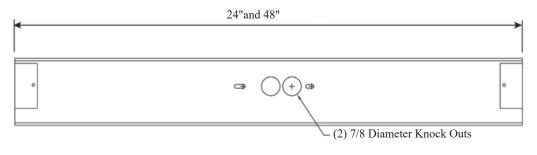







Dimensions and specifications subject to change without notice.



JOB NAME: CAT#: TYPE:

ORDERING

EXAMPLE: 74 24 LED 24 DMV 30

74		LED				
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. HOUSING	7. COLOR TEMP
74	24 24" 48 48"	LED	2 Ft. 24 24 Watts 2250 Lumens 28 28 Watts 2250 Lumens 4 Ft. 24 24 Watts 2250 Lumens 48 48 Watts 4500 Lumens 57 57 Watts 5100 Lumens	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt DHV 347-480VAC 0-10V Dimming D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC	(Blank) Chrome (std) WH White	30 3000K 35 3500K 40 4000K 50 5000K

8. PULL CHAIN(O)1

PS1 Single position pull chain

ACCESSORY

A99 Convenience outlet

NOTES:

¹O is optional





