

JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This UFO style high bay fixture is perfect for institutional, retail, and commercial applications including: gynasiums, factories, and warehouses.



FEATURES & BENEFITS


- Operating temperature -40°C to 55°C (-40°F to 131°F)
- Replaces 250W to 400W MH
- Hook or conduit pendant mountable
- Hook mount comes standard
- $_{\rm c}{\rm UL}_{\rm us}$ listed for wet locations
- 5 year warranty



Without Sensor

DIMENSIONS



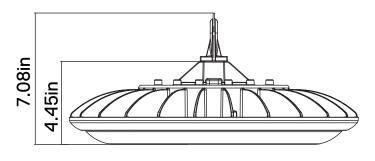

Weight: 100W: 8.3lb 180W: 9.5lb



© COPYRIGHT 2008-21 MOBERN LIGHTING COMPANY



JOB NAME:

CAT#:

TYPE:

DIMENSIONS



ORDERING

EXAMPLE: HBU LED 100 DMV WH 30 OS

| HBU | LED | | | | W | /H | | | | |
|-----------|---------|---|-----------|---|-----------|-------|---------------|----------------|----------------------------|------------------|
| 1. SERIES | 2. GEAR | 3. WATTAGE/LUMENS | 4. DRIVER | | 5. FINISH | | 6. COLOR TEMP | | 7. SENSOR (O) ¹ | |
| HBU | LED | DMV 100 100 Watts 14000 Lumens 180 180 Watts 25000 Lumens | DMV | 120-277V Multivolt 0-10V Dimmable | ₩Н | White | 40 50 | 4000K 5000K | os | Occupancy Sensor |
| | | DHV 90 90 Watts 13000 Lumens 140 140 Watts 20500 Lumens | DHV | 347-480VAC 0-10V Dimmable | | | | | | |

Notes:

¹(O) is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



800-444-WATT (9288) WWW.MOBERN.COM 2055 LUNA RD., STE. 142 CARROLLTON, TX 75006

*Lumens at 4000K

© COPYRIGHT 2008-21 MOBERN LIGHTING COMPANY REVISED 05/17/2022

PAGE 2/3





PHOTOMETRICS

